

LENOX **ALWAYS HUNGRY**™

TOOL CATALOG POWER TOOL ACCESSORIES | HAND TOOLS



TABLE OF CONTENTS



POWER TOOL ACCESSORIES

RECIPROCATING SAW BLADES.....	2
PORTABLE BAND SAW BLADES.....	12
JIG SAW BLADES	13
CIRCULAR SAW BLADES	24
LENOX METALMAX®	
ABRASIVE CUTTING WHEELS.....	25
HOLE SAWS	26
ARBORS	32
STEP DRILL BITS	38
SHIP AUGERS	39
UTILITY BITS.....	40
SELF-FEED BITS.....	41


HAND TOOLS

HACKSAW BLADES & FRAMES	42
HAND SAWS.....	45
SNIPS & HVAC TOOLS.....	46
TUBING CUTTERS	47
PLIERS & WRENCHES	51
UTILITY KNIVES & BLADES	53
LEVELS.....	55
SCREWDRIVERS	56
WORKSITE STORAGE.....	63



A HISTORY OF RECIP LEADERSHIP

LENOX® now has over a century of cutting expertise, delivering solutions that make our end users more productive. LENOX defined performance in the reciprocating saw blade category since inventing the first bi-metal blade in 1977. LENOX has continued to lead the way in recip performance and is redefining performance levels in the bi-metal reciprocating category with the introduction of WAVE EDGE™ Saw Blade Technology.

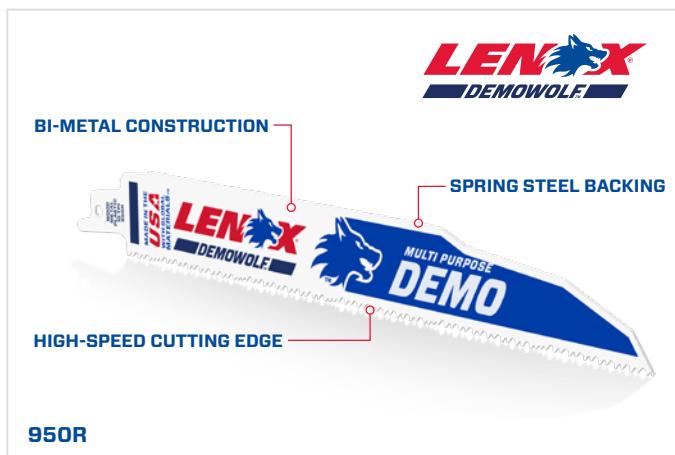

*The WAVE EDGE claim above only applies to MULTIWOLF™ and select METALWOLF™ and DEMOWOLF™ models vs. prior LENOX generation

LENOX CARBIDE TIPPED RECIPROCATING SAW BLADES

CARBIDE TIPPED FOR THE HIGHEST PERFORMANCE DEMANDING METAL & NAIL-EMBEDDED WOOD APPLICATIONS



LAZER CT™
UP TO 50X LIFE™



UP TO 50X LIFE*

High performance carbides are welded to the cutting edge for durability and to help reduce tooth loss

QUICK CUTS IN DEMANDING METAL CUTTING APPLICATIONS

Titanium nitride coating makes teeth more wear-resistant so they stay sharp for quicker cuts

ENGINEERED FOR PERFORMANCE

Each tooth is precision ground to cut through a wide range of metals including steel pipe, cast iron and stainless steel



STRAIGHT CUTS IN LARGE DIAMETER MATERIALS

Tall, thick blade profile designed to add durability and minimize blade breaks to help deliver straight cuts

TPI	LENGTH X WIDTH X THICKNESS	1-PACK	3-PACK	5-PACK	APPLICATION
	IN	MM	PROD NO	PROD NO	PROD NO
8	6 X 1 X .050	152 X 25 X 1.3	2014220	2058828	2014223
8	9 X 1 X .050	229 X 25 X 1.3	2014224	2058829	2014225
8	12 X 1 X .050	305 X 25 X 1.3	LXAR12108CT-1	—	LXAR12108CT
10	6 X 1 X .050	152 X 25 X 1.3	LXAR6110CT-1	LXAR6110CT-3	LXAR6110CT
10	9 X 1 X .050	229 X 25 X 1.3	LXAR9110CT-1	LXAR9110CT-3	LXAR9110CT
10	12 X 1 X .050	305 X 25 X 1.3	LXAR12110CT-1	—	LXAR12110CT

DEMOLITION CT™



UP TO 50X LIFE**

High performance carbides are welded to the cutting edge for durability and to help reduce tooth loss

ENGINEERED FOR FAST PERFORMANCE

Each tooth is precision ground ideal for cutting through dense wood with nails

STANDS UP TO TOUGH DEMOLITION APPLICATIONS

Tall, thick blade profile designed to add durability and minimize blade breaks

TPI	LENGTH X WIDTH X THICKNESS	1-PACK	3-PACK	5-PACK	APPLICATION
	IN	MM	PROD NO	PROD NO	PROD NO
6	6 X 1 X .050	152 X 22 X 1.3	1832118	—	1832162
6	9 X 1 X .050	229 X 22 X 1.3	1832143	2059102	1832144
6	12 X 1 X .050	305 X 22 X 1.3	1832146	2058827	1832147

*vs. prior generation 10TPI Standard LENOX® Bi-Metal reciprocating saw blades cutting cast iron and rebar.

**vs. prior generation 6TPI Standard LENOX® Bi-Metal reciprocating saw blades cutting wood with nails



LENOX GOLD® POWER ARC® RECIPROCATING SAW BLADES

POWER ARC® W BLADE

Delivers up to 2X longer life vs. standard LENOX straight reciprocating saw blades*

AGGRESSIVE BLADE DESIGN

Optimizes the blade's angle of attack for fast cutting in a variety of materials

EXTENDED BLADE LIFE

T2 Technology™ and precision applied titanium nitride coating help dissipate heat making blades last longer

QUICKER CUTS

Titanium nitride coating makes teeth more wear-resistant so they stay sharp for quicker cuts



*vs. standard LENOX® straight blades.



TPI	LENGTH X WIDTH X THICKNESS	IN	MM	PROD NO	5-PACK PROD NO	25-PACK PROD NO	APPLICATION
10	6 x 1 x .042	152 x 25 x 1.07	210936110GR	—	—	—	Thick Metal
10	9 x 1 x .042	229 x 25 x 1.07	210979110GR	21229B9110GR	—	—	Thick Metal
10	12 x 1 x .042	305 x 25 x 1.07	2110012110GR	—	—	—	Thick Metal
14	6 x 1 x .035	152 x 25 x .9	210946114GR	21226B6114GR	—	—	Thick Metal
14	9 x 1 x .035	229 x 25 x .9	210989114GR	21235B9114GR	—	—	Thick Metal
14	12 x 1 x .042	305 x 25 x 1.07	2110112114GR	21238B12114GR	—	—	Thick Metal
18	6 x 1 x .035	152 x 25 x .9	210956118GR	21227B6118GR	—	—	Medium Metal
18	9 x 1 x .035	229 x 25 x .9	210999118GR	21236B9118GR	—	—	Medium Metal
18	12 x 1 x .042	305 x 25 x 1.07	2110212118GR	21239B12118GR	—	—	Medium Metal
10	6 x 3/4 x .035	152 x 19 x .9	21064610GR	21078B610GR	—	—	Wood, Metal, Plastic
10	8 x 3/4 x .050	203 x 19 x 1.3	21065810GR	21079B810GR	—	—	Wood, Metal, Plastic
14	6 x 3/4 x .035	152 x 19 x .9	21067614GR	21081B614GR	—	—	Thick Metal
18	6 x 3/4 x .035	152 x 19 x .9	21069618GR	21083B618GR	—	—	Medium Metal
18	8 x 3/4 x .035	203 x 19 x .9	21070818GR	21084B818GR	—	—	Medium Metal, Thin Metal
24	6 x 3/4 x .035	152 x 19 x .9	21072624GR	—	—	—	Thin Metal
24	8 x 3/4 x .035	203 x 19 x .9	21073824GR	—	—	—	Thin Metal
6	6 x 1 x .062	152 x 25 x 1.6	—	—	—	—	Demolition, Nail-Embedded Wood
6	9 x 1 x .062	229 x 25 x 1.6	21090966GR	—	—	—	Demolition, Nail-Embedded Wood
6	12 x 1 x .062	305 x 25 x 1.6	21091106GR	—	—	—	Demolition, Nail-Embedded Wood
10	9 x 1 x .062	229 x 25 x 1.6	21089960GR	21221B960GR	—	—	Demolition, Thick Metal, Fire Rescue
6	6 x 7/16 x .050	152 x 11 x 1.3	21063676GRC*	—	—	—	Contour Wood
6	6 x 3/4 x .050	152 x 19 x 1.3	21060656GR	21074B656GR	—	—	Wood, Nail-Embedded Wood
6	9 x 3/4 x .050	229 x 19 x 1.3	21062956GR	—	—	—	Wood, Nail-Embedded Wood
6	12 x 3/4 x .050	305 x 19 x 1.3	21061156GR	—	—	—	Wood, Nail-Embedded Wood

*Blades do not feature Power Arc® technology.



LENOX® METALWOLF™ WAVE EDGE™ RECIPROCATING SAW BLADES

UP TO 50% LONGER LIFE*

Revolutionary WAVE EDGE™ tooth form design utilizes a 3-stage tooth formation to help improve cutting life



DESIGNED FOR EXTENSIVE METAL APPLICATIONS

Thin blade design is ideal for making quick cuts through a range of metal types and gauges

RELIABLY AGGRESSIVE CUTTING

High-speed steel cutting edge and spring steel backing helps strengthen the blade, reduce breaks, and provides durability for long blade life



*The claim above only applies to MULTIWOLF™ and select METALWOLF™ and DEMOWOLF™ models vs. prior LENOX generation

								UP TO 50% LONGER LIFE WAVE EDGE™ SELECT MODELS	MADE IN THE USA WITH GLOBAL MATERIALS
TPI	LENGTH X WIDTH X THICKNESS	1-PACK	2-PACK	5-PACK	25-PACK	50-PACK	APPLICATION		
	IN	MM	PROD NO	PROD NO	PROD NO	PROD NO			
10	6X1X.042	152X25X1.07	—	—	201706110R	20171B6110R	—	Thick Metal	
10	9X1X.042	229X25X1.07	—	24905T9110R	201769110R	20177B9110R	—	Thick Metal	
10	12X1X.042	305X25X1.07	—	—	2018212110R	20183B12110R	—	Thick Metal	
14	6X1X.035	152X25X.9	—	—	201726114R	20173B6114R	227640SB6114R	Thick Metal	
14	9X1X.035	229X25X.9	—	24906T9114R	201789114R	20179B9114R	227660SB9114R	Thick Metal	
14	12X1X.042	305X25X1.07	—	—	2018412114R	20185B12114R	—	Thick Metal	
12/16	9X1X.042	229X25X.9	—	—	—	1954462*	—	Auto Dismantling, Medium & Thick Metal	
12/16	12X1X.042	305X25X1.07	—	—	—	1954463*	—	Auto Dismantling, Medium & Thick Metal	
18	6X1X.035	152X25X.9	—	—	201746118R	20175B6118R	227650SB6118R	Medium Metal	
18	9X1X.035	229X25X.9	—	24907T9118R	201809118R	20181B9118R	227670SB9118R	Medium Metal	
18	12X1X.042	305X25X1.07	—	—	2019012118R	20191B12118R	—	Medium Metal	
14	4X3/4X.035	102X19X.9	—	—	20550414R	—	227600SB414R	Thick Metal	
14	6X3/4X.035	152X19X.9	20565S614R	—	20564614R	20494B614R	227560SB614R	Thick Metal	
14	8X3/4X.035	203X19X.9	—	—	21519814R	1855567	1855570	Thick Metal	
14	9X3/4X.050	229X19X1.3	—	205119514R	—	—	—	Thick Metal	
10	6X3/4X.035	152X19X.9	20561S610R	—	20562610R	20493B610R	227610SB610R	Wood, Metal, Plastic	
10	8X3/4X.050	203X19X1.3	20581S810R	—	20580810R	20590B810R	227530SB810R	Wood, Metal, Plastic	
10/14	6X3/4X.050	152X19X1.3	—	20592650R	20374650R5	20515B650R	—	Fire Rescue, Wood, Metal, Plastic	
10/14	8X3/4X.050	203X19X1.3	—	—	20577850R	20535B850R	—	Fire Rescue, Wood, Metal, Plastic	
10/14	12X3/4X.050	305X19X1.3	20584S110R	—	20583110R	20491B110R	227580SB110R	Wood, Metal, Plastic	
18	4X3/4X.035	102X19X.9	20553S418R	—	20552418R	20489B418R	227590SB418R	Medium Metal	
18	6X3/4X.035	152X19X.9	20567S618R	—	20566618R	20529B618R	227510SB618R	Medium Metal	
18	8X3/4X.035	203X19X.9	20563S818R	—	20578818R	20487B818R	227540SB818R	Medium Metal	
18	12X3/4X.035	12X19X.9	—	—	21510118R	21511B118R	—	Medium Metal	
18	3-5/8X5/16X.035	92X8X.9	—	—	20521318RC	—	—	Contour Metal	
24	6X3/4X.035	152X19X.9	20569S624R	—	20568624R	20496B624R	227570SB624R	Thin Metal	
24	8X3/4X.035	203X19X.9	—	—	20579824R	—	—	Thin Metal	

*Blades do not feature Wave Edge technology.



LENOX® MULTIWOLF™ WAVE EDGE™ RECIPROCATING SAW BLADES

UP TO 50% LONGER LIFE*

Revolutionary WAVE EDGE™ tooth form design utilizes a 3-stage tooth formation to help improve cutting life



CUT THROUGH A WIDE VARIETY OF MATERIALS

Designed for making quick, clean cuts in metal, wood, and plastic



RELIABLY AGGRESSIVE CUTTING

High-speed steel cutting edge and spring steel backing helps strengthen the blade, reduce breakage, and provides durability for long blade life



*The claim above only applies to MULTIWOLF™ and select METALWOLF™ and DEMOWOLF™ models vs. prior LENOX® generation.

TPI	LENGTH X WIDTH X THICKNESS	1-PACK	2-PACK	5-PACK	25-PACK	50-PACK	APPLICATION	
TPI	IN	MM	PROD NO	PROD NO	PROD NO	PROD NO	PROD NO	
10	6 X 3/4 X .035	152 X 19 X .9	20561S610R	—	20562610R	20493B610R	227610SB610R	Wood, Metal, Plastic
10	8 X 3/4 X .050	203 X 19 X 1.3	20581S810R	—	20580810R	20590B810R	227530SB810R	Wood, Metal, Plastic
10/14	12 X 3/4 X .050	305 X 19 X 1.3	20584S110R	—	20583110R	20491B110R	227580SB110R	Wood, Metal, Plastic
10/14	6 X 3/4 X .050	152 X 19 X 1.3	—	20592650R	20374650R5	20515B650R	—	Fire Rescue, Wood, Metal, Plastic
10/14	8 X 3/4 X .050	203 X 19 X 1.3	—	—	20577850R	20535B850R	—	Fire Rescue, Wood, Metal, Plastic



LENOX® DEMOWOLF™ RECIPROCATING SAW BLADES

OPTIMIZED TO PERFORM CUT AFTER CUT

Tall, thick blade profile designed to add durability and minimize blade breaks to deliver the endurance needed for rigorous demolition application



PLUNGE CUT WITH EASE

Blade tip designed for easy, quick, and clean plunge cutting



RELIABLY AGGRESSIVE CUTTING

High-speed steel cutting edge and spring steel backing helps strengthen the blade, reduce breaks, and provides durability for long blade life

*The claim above only applies to DEMOWOLF™ models 950R & 1250R – vs. prior LENOX® generation.



TPI	LENGTH X WIDTH X THICKNESS	1-PACK	5-PACK	25-PACK	50-PACK	WAVE EDGE	RAPID PLUNGE	APPLICATION	
TPI	IN	MM	PROD NO	PROD NO	PROD NO	PROD NO	PROD NO	PROD NO	
6	6 X 1 X .062	152 X 25 X 1.6	205126066R	203706066R5	20514B6066R	—	—	**	Demolition, Nail-Embedded Wood
6	9 X 1 X .062	229 X 25 X 1.6	20598966R	20371966R5	20523B966R	227630SB966R	—	**	Demolition, Nail-Embedded Wood
6	12 X 1 X .062	305 X 25 X 1.6	20500106R	20373106R5	20485B106R	—	—	**	Demolition, Nail-Embedded Wood
10	9 X 1 X .050	229 X 25 X 1.3	—	LXAR950R	LXARB950R	—	*	—	Demolition, Wood, Metal, Plastic
10	12 X 1 X .050	305 X 25 X 1.3	—	LXAR1250R	LXARB1250R	—	*	—	Demolition, Wood, Metal, Plastic
10	9 X 1 X .062	229 X 25 X 1.6	20597960R	20372960R5	20524B960R	227620SB960R	—	—	Demolition, Fire and Rescue

*Only applies to 950R & 1250R **Excludes DEMOWOLF BLADES 950R, 1250R, 960R



LENOX® LUMBERWOLF™ RECIPROCATING SAW BLADES

CUT THROUGH WOOD WITH NAILS WITH EASE

Blade thickness and profile are ideal for cutting through dense wood with nails



PLUNGE CUT WITH EASE

Blade tip designed for easy, quick, and clean plunge cutting



**For LENOX blades with this feature, refer to product packaging or go to www.lenoxtools.com
Applies to LUMBERWOLF™ blade models except for 634R and 676RC.



RELIABLY AGGRESSIVE CUTTING

High-speed steel cutting edge and spring steel backing helps strengthen the blade, reduce breaks, and provides durability for long blade life

LENGTH X WIDTH X THICKNESS			1-PACK	5-PACK	25-PACK	50-PACK	RAPID PLUNGE	APPLICATION
TPI	IN	MM	PROD NO	PROD NO	PROD NO	PROD NO		
4	4 X 3/4 X .050	102 X 19 X 1.3	20574S634R	20575634R	—	—	—	Fast Wood
6	6 X 7/16 X .050	152 X 11 X 1.3	—	20556676RC	—	—	—	Nail-Embedded Wood
6	6 X 3/4 X .050	152 X 19 X 1.3	20573S656R	20572656R	20530B656R	227500SB656R	**	Nail-Embedded Wood
6	9 X 3/4 X .050	229 X 19 X 1.3	20587S956R	20582956R	20558B956R	227520SB956R	**	Nail-Embedded Wood
6	12 X 3/4 X .050	305 X 19 X 1.3	20586S156R	20585156R	20495B156R	227550SB156R	**	Nail-Embedded Wood

BI-METAL CONSTRUCTION

Durable and flexible to survive nail strikes



FLEAM GROUND TOOTH FORM

Fast, clean wood cutting

IDEAL FOR CLEAN WOOD, PLASTIC PIPE AND TREE PRUNING

LENGTH X WIDTH X THICKNESS			5-PACK	APPLICATION
TPI	IN	MM	PROD NO	
6	6 X 3/4 X .050	152 X 19 X 1.3	121016W6R	Clean Wood, Plastics, Pruning
6	8 X 3/4 X .050	229 X 19 X 1.3	121029W6R	Clean Wood, Plastics, Pruning
6	6 X 3/4 X .050	152 X 19 X 1.3	20570636RP*	Drywall/Plaster

*Blade does not have fleam ground toothform

LENOX DIAMOND™ & CARBIDE GRIT RECIPROCATING SAW BLADES

LASTS LONGER

Nickel alloy-brazed lab-made diamond particles maintain sharpness to keep cutting after conventional carbide grit blades fail



STRAIGHT, CLEAN CUTS

Unlike bulky snap cutters which crush pipes and leave ragged, uneven cuts, LENOX DIAMOND™ cuts clean.

Durable chrome alloy backing steel provides extra stability

LENGTH X WIDTH X THICKNESS			1-PACK	APPLICATION
IN	MM	PROD NO		
8 X 3/4 X .040	203 X 19 X 1.00	10833800RDG	Cast Iron, Tile, Brick and Natural Stone	
9 X 3/4 X .042	225 X 19 X 1.07	1766338	Cast Iron, Tile, Brick and Natural Stone	
11 X 3/4 X .042	275 X 19 X 1.07	1766356	Cast Iron, Tile, Brick and Natural Stone	



HIGH PERFORMANCE IN ABRASIVE MATERIALS

Cuts through tough materials that resist chip-forming, including ceramics, pipe, man-made stone, brick, marble and more



SMOOTH, QUICK CUTS

Uniformly applied, durable carbide grit particles on a flexible blade provide quicker cuts without snagging or binding

LENGTH X WIDTH X THICKNESS			1-PACK	APPLICATION
IN	MM	PROD NO	GRIT	
6 X 3/4 X .032	152 X 19 X .8	20505600RG	MEDIUM	Fiberglass, Ceramic, Tile, Cultured Marble, Clays, Brick
8 X 3/4 X .040	203 X 19 X 1	20576800RG	MEDIUM	Fiberglass, Ceramic, Tile, Cultured Marble, Clays, Brick
10 X 3/4 X .050	254 X 19 X 1.3	20506100RG	MEDIUM	Fiberglass, Ceramic, Tile, Cultured Marble, Clays, Brick

*This blade uses manufactured nickel alloy-brazed lab-made diamond particles engineered for cutting



RECIPROCATING SAW BLADE KITS


LXARCT5SET
5 PIECE
CARBIDE TIPPED RECIP KIT

Includes Storage Case

LENGTH X WIDTH X THICKNESS							
QTY	PROD NO	TPI	IN	MM	APPLICATION	WAVE EDGE	RAPID PLUNGE
1	656RCT	6	6 X 1 X .050	152 X 25 X 1.3		-	-
1	6108RCT	8	6 X 1 X .050	152 X 25 X 1.3		-	-
1	6110RCT	10	6 X 1 X .050	152 X 25 X 1.3		-	-
1	956RCT	6	9 X 1 X .050	229 X 25 X 1.3		-	-
1	9108RCT	8	9 X 1 X .050	229 X 25 X 1.3		-	-

1214412RKD
12 PIECE
DEMOLITION KIT
 Includes Storage Case

LENGTH X WIDTH X THICKNESS							
QTY	PROD NO	TPI	IN	MM	APPLICATION	WAVE EDGE	RAPID PLUNGE
3	6066R	6	6 X 1 X .062	150 X 22 X 1.6		-	X
3	6114R	14	6 X 1 X .035	150 X 25 X .9		X	-
2	9114R	14	9 X 1 X .035	229 X 25 X .9		X	-
2	966R	6	9 X 1 X .062	229 X 22 X 1.6		-	X
2	960R	10	9 X 1 X .062	229 X 22 X 1.6		-	-


121439KPE
9 PIECE
GENERAL PURPOSE KIT

Includes Storage Case

LENGTH X WIDTH X THICKNESS							
QTY	PROD NO	TPI	IN	MM	APPLICATION	WAVE EDGE	RAPID PLUNGE
2	656R	6	6 X 3/4 X .050	152 X 19 X 1.3		-	X
2	624R	24	6 X 3/4 X .035	152 X 19 X .9		X	-
2	818R	18	8 X 3/4 X .035	203 X 19 X .9		X	-
2	810R	10	8 X 3/4 X .050	203 X 19 X 1.3		X	-
1	960R	10	9 X 1 X .062	229 X 22 X 1.6		-	-

1073415RKG
15 PIECE
GENERAL PURPOSE KIT
 Includes Storage Case

LENGTH X WIDTH X THICKNESS							
QTY	PROD NO	TPI	IN	MM	APPLICATION	WAVE EDGE	RAPID PLUNGE
5	614R	14	6 X 3/4 X .035	152 X 19 X .9		X	-
5	618R	18	6 X 3/4 X .035	152 X 19 X .9		X	-
5	656R	6	6 X 3/4 X .050	152 X 19 X 1.3		-	X



1839465
5 PIECE
DEMOLITION KIT

LENGTH X WIDTH X THICKNESS							
QTY	PROD NO	TPI	IN	MM	APPLICATION	WAVE EDGE	RAPID PLUNGE
1	6066R	6	6 X 1 X .062	150 X 25 X 1.6		-	X
1	6114R	14	6 X 1 X .035	150 X 25 X .9		X	-
1	9114R	14	9 X 1 X .035	229 X 25 X .9		X	-
1	966R	6	9 X 1 X .062	229 X 25 X 1.6		-	X
1	960R	10	9 X 1 X .062	229 X 25 X 1.6		-	-


*Speed measured cutting 4" cast iron pipe at maximum speed vs. the leading competitor.

RECIPROCATING SAW BLADE SELECTION GUIDE



	NON-FERROUS METAL	THIN METAL	MEDIUM METAL	THICK METAL	STAINLESS STEEL	PLASTICS & COMPOSITES	WOOD	NAIL-EMBEDDED WOOD	DEMOLITION	FIRE & RESCUE	DRYWALL/PLASTER	CAST IRON	TILE & GRANITE	ABRASIVES
BEST	LENOX CURVED & COATED	CARBIDE LAZER CT™	LENOX COATED & CURVED	LENOX CURVED & COATED	CARBIDE LAZER CT™			SPECIALTY	CARBIDE LAZER CT™	CARBIDE LAZER CT™				
BETTER	WAVE EDGE™ METALWOLF™	LENOX CURVED & COATED	WAVE EDGE™ METALWOLF™ LUMBERWOLF™	WAVE EDGE™ LUMBERWOLF™	LENOX CURVED & COATED			—	DIAMOND™ GRIT					
GOOD	—	WAVE EDGE™ METALWOLF™	—	—	WAVE EDGE™ LUMBERWOLF™	WAVE EDGE™ DEMOWOLF™	—	—	CARBIDE GRIT					

†Nickel alloy-brazed lab-made diamond particles

TEETH PER INCH SELECTION GUIDE

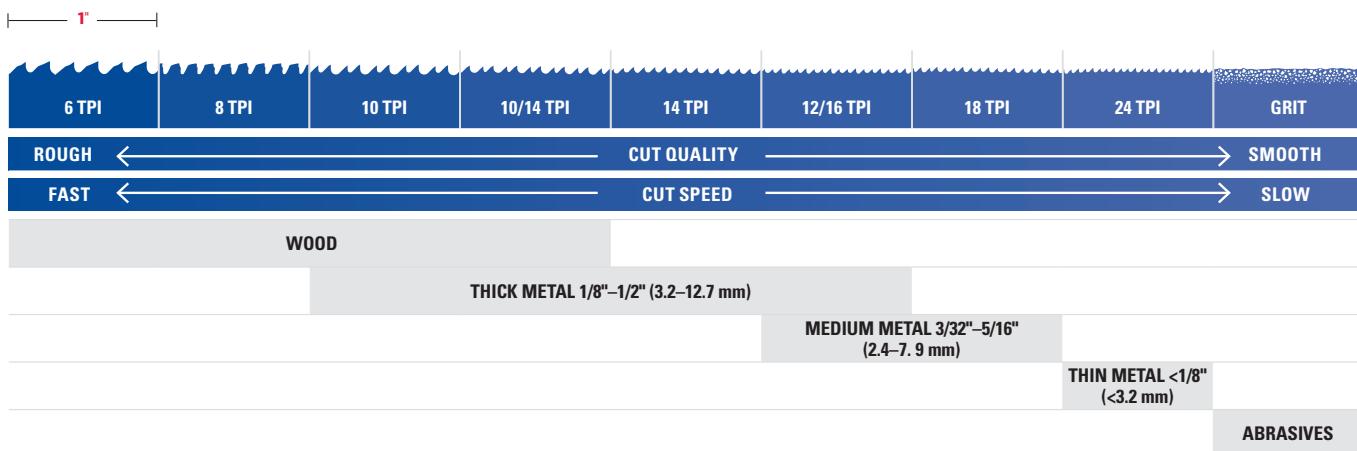

BLADE LENGTH SELECTION GUIDE

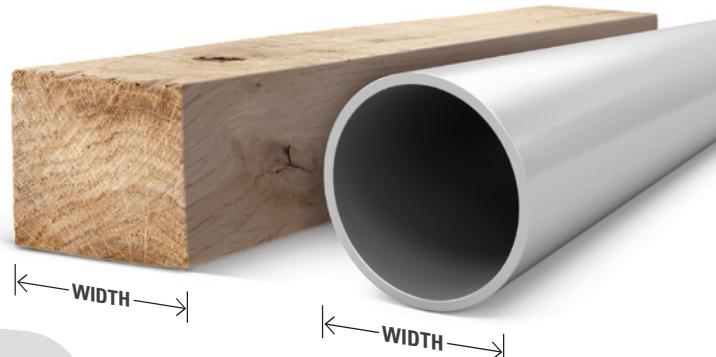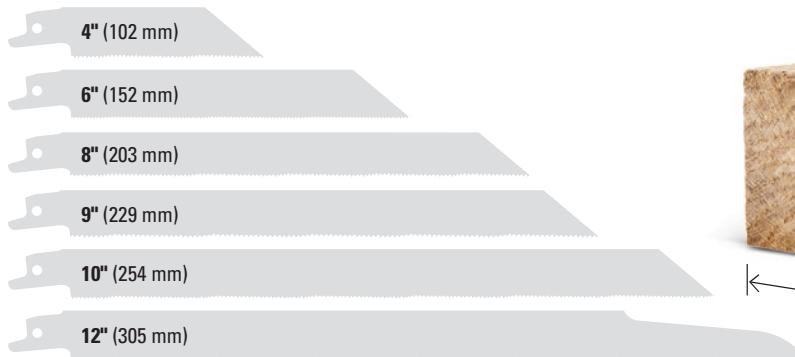

WIDTH OF MATERIAL + 3" (76 mm) = BLADE LENGTH

Example: 5" (width) + 3" (76 mm) = 8" (203 mm).

Use an 8" (203 mm) or 9" (229 mm) blade

TIP

Always keep 2-3 teeth in the material at all times



RECIPROCATING SAW BLADE CROSS REFERENCE CHART

LENGTH				SHAPE	MILWAUKEE®	DIABLO®	MK MORSE®
TPI	IN	MM	PROD NO				
6	6	152	676GRC*		—	—	—
6	6	152	656GR		—	—	—
6	9	229	956GR		—	—	—
6	9	229	966GR		—	—	—
6	12	305	156GR		—	—	—
6	12	305	106GR		—	—	—
10	6	152	610GR		—	—	—
10	6	152	6110GR		—	—	—
10	8	203	810GR		—	—	—
10	9	229	9110GR		—	—	—
10	9	229	960GR		—	—	—
10	12	305	12110GR		—	—	—
14	6	152	614GR		—	—	—
14	6	152	6114GR		—	—	—
14	9	229	9114GR		—	—	—
14	12	305	12114GR		—	—	—
18	6	152	618GR		—	—	—
18	6	152	6118GR		—	—	—
18	8	203	818GR		—	—	—
18	9	229	9118GR		—	—	—
18	12	305	12118GR		—	—	—
24	6	152	624GR		—	—	—
24	8	203	824GR		—	—	—
8	6	152	6108RCT		5201, 5301, 5501	DS0608CF, DS0608CF3, DS0608CF10	CTR608MC1, CTR608MC5, CTR608MC15
8	9	229	9108RCT		5202, 5302, 5502	DS0908CF, DS0908CF3, DES0908CF10	CTR908MC1, CTR908MC5, CTR908MC15
8	12	305	12108RCT		—	DS1208CF, DS1208CF3, DS1208CF10	CTR1208MC1, CTR1208MC5, CTR1208MC15
10	6	152	6110RCT		—	DS0610CF, DS0610CF3, DS0610CF10	—
10	9	229	9110RCT		—	DS0910CF, DS0910CF3, DS0910CF10	—
10	12	229	12110RCT		—	DS1210CF, DS1210CF3, DS1210CF10	—
6	6	152	656RCT		5221, 5202, 5302, 5502	DS0606CWS, DS0606CWS3, DS0606CWS10	—
6	9	229	956RCT		5226	DS0906CWS, DS0906CWS3, DS0906CWS10	—
6	12	305	156RCT		5227	DS1206CWS, DS1206CWS3, DS1206CWS10	—
6	6	152	6066R		5021, 8021	DS0614BGP5	—
6	9	229	966R		5026	—	—
6	12	305	106R		5027	—	—
10	9	229	960R		—	—	RBR962811T03, RB96210T03

*Blades do not feature Power ArC® technology.

Milwaukee is a registered trademark of Milwaukee Electric Tool Corp., which has not endorsed or approved this comparison.



SPECIALTY

TPI	LENGTH		PROD NO	SHAPE	MILWAUKEE®	DIABLO®	MK MORSE®
	IN	MM					
10	6	152	6110R		4172, 5712	DS0608BFD5, DS0608CF3	—
10	9	229	9110R		4713, 5713	DS0908BFD2, DS0908BFD5, DS0908BFD25	RB1010T05
10	12	305	12110R		5714	—	RBSA121014T05, RB1210T05
14	6	152	6114R		4782	DS0414BF5, DS0614BF2, DS0614BF5, DS0614BF25	RBPB65014T05, RBAE61115T05, RBAE6501115T05
14	9	229	9114R		4787, 5787	DS0914BF5	RBPB125014T05, RBAE91115T05, RBAE9501115T05
14	12	305	12114R		5794	DS1214BF5	RBAE121115T05, RBAE12501115T05, RBPB125014T05
14	3-5/8	92	314RC		5161, 5162	—	—
14	4	102	414R		5181	—	RB414T05
14	6	152	614R		5182, 4182,	—	RB65014T05, RB64214T05, RBWP64214T05, RB614T05
14	8	203	814R		5187, 4182, 7187	—	RB814, RBMC814
14	9	225	9514R		—	—	RBWP94214T05
12/16	9	229	9126R		—	—	—
12/16	12	305	12126R		—	—	—
18	6	152	6118R		4784, 5784	—	RB65018T05, RBAE61521T05, RBAE6501521T05
18	9	229	9118R		4788, 5790, 5788	—	RBSA818T05, RBAE91521T05, RBAE9501521T05
18	12	305	12118R		4789, 5791, 8789, 5789	—	RBSA1218T05, RBAE12521T05, RBAE12501521T05
18	3-5/8	92	318RC		5163	—	RB318ST05, RB318ST50
18	4	102	418R		5183	—	—
18	6	152	618R		4184, 5184	—	RB64218T05, RB618T05, RBWP64218T05
18	8	203	818R		4188, 5188	—	RB94218T05, RB918T05, RB818T05
18	12	305	118R		5189	—	RB124218T05, RB1018T05, RB1218T05
24	6	152	624R		4186, 5186, 8186	—	RB64224T05, RB624T05
24	8	203	824R		—	DS0920BF2, DS0920BF5, DS0920BF25	—
10	6	152	610R		5090, 5091, 4091, 5092	—	RBWP64210T05, RB610T05
10	8	203	810R		4093, 5093	DS0914BGP2, DS-0914BGP5, DS0914BGP25	RBWP94210T05, RB810T05
10/14	6	152	650R		—	—	RB41014T05, RB61014T05, RB6501014T05, RB6501014TT05
10/14	8	203	850R		5193	DS0914AFC2, DS0914AFC5	RB81014C2, RB850812T05, RB81014T05, RB8501014T05
10/14	12	305	110R		5094, 5194	DS1214AFC5	RB125010T05, RB12551014T05, RB121014T05, RB12501014TT05
4	6	152	634R		—	—	—
6	6	152	656R		5035	DS0612BW2, DS0612BW5, DS0612BW25	RB63506T05, RB65006T05, RB65058T05
6	6	152	676RC		1606, 5041	—	RB65006CT05, RB65006CT50
6	9	229	956R		5016, 5036	DS0912BW2, DS0912BW5, DS0912BW25	RB95006C2, RB93506T05, RB95006T05
6	12	305	156R		5017, 5037	DS1212BW2, DS1212BW5, DS1212BW25	RB123506T05, RB125006T05
6	6	152	6W6R		1301, 1303, 1304, 1305, 7015, 7016	—	—
6	9	229	9W6R		—	DS0905FG, DS0905FG5, DS1205FG, DS1205FG5	—
6	6	152	636RP		—	—	RB65006PT05
GRIT	9	225	800DTDG		1450	DS0930DGX	RBDG9C
GRIT	11	275	100DTDG		—	—	—
Grit	6	152	600RG		1421, 6430, 1420	—	RTCG6
Grit	8	203	800RG		1431, 6430, 1430	—	RTCG8
Grit	10	254	100RG		—	—	—

Diablo is a registered trademark of Freud America, Inc., which has not endorsed or approved this comparison.
The M.K. Morse Company has not endorsed or approved this comparison.



MASTER-BAND™ BLADES

MAXIMUM PERFORMANCE FOR PORTABLE BAND SAWS

ENHANCED BEAM STRENGTH

Specially treated bands of .023 and .025 thicknesses offer increased blade strength, reducing deflection and twisting of blades

SHATTER RESISTANT

Bi-Metal blades are designed to bend and resist breaking and extend blade life

LONG LASTING

LENOX TUFF TOOTH® design reinforces tooth for long blade life



TPI	LENGTH X WIDTH X THICKNESS	EDGE	MATERIAL	3-PACK PROD NO	25-PACK PROD NO	APPLICATION
IN	MM					
10/14	44-7/8 x 1/2 x .023	1140 x 12.7 x .6	Matrix	8011438EW1014	9403B38EW1014	1/4" & larger, most metals
14	44-7/8 x 1/2 x .023	1140 x 12.7 x .6	Matrix	8011538EW14	9404B38EW14	3/16"-3/8," most metals
14/18	44-7/8 x 1/2 x .023	1140 x 12.7 x .6	Matrix	8011238EW1418	9407B38EW1418	1/8"-5/16," most metals
18	44-7/8 x 1/2 x .023	1140 x 12.7 x .6	Matrix	8011638EW18	9405B38EW18	3/32"-1/4," most metals
24	44-7/8 x 1/2 x .023	1140 x 12.7 x .6	Matrix	8011738EW24	—	up to 1/8," most metals
10/14	44-7/8 x 1/2 x .025	1140 x 12.7 x .6	M42	8014438EW1014	9399B385EW1014	1/4" & larger, metals, including stainless steel
14	44-7/8 x 1/2 x .025	1140 x 12.7 x .6	M42	8014538EW14	—	3/16"-3/8," metals, including stainless steel
14/18	44-7/8 x 1/2 x .025	1140 x 12.7 x .6	M42	80142385EW1418	9401B385EW1418	1/8"-5/16," metals, including stainless steel
18	44-7/8 x 1/2 x .025	1140 x 12.7 x .6	M42	82310385EW18	9402B385EW18	3/32"-1/4," metals, including stainless steel

WOLF-BAND® BLADES

PROFESSIONAL PERFORMANCE AND EXCEPTIONAL VALUE

LONG LASTING

High speed steel teeth provide a strong, long lasting cutting edge

SHATTER RESISTANT

Bi-Metal blades bend and resist breaking and extend blade life

EXCEPTIONAL VALUE

Professional performance and competitive pricing provide extraordinary cost-per-cut value

TPI	LENGTH X WIDTH X THICKNESS	3-PACK		5-PACK		25-PACK		APPLICATION
		IN	MM	PROD NO	PROD NO	PROD NO	PROD NO	
10/14	44-7/8 X 1/2 X .020	1140 X 12.7 X .5	—	8009838PW10145	3842338PW1014	1/4" (6 mm) & LARGER		
14	44-7/8 X 1/2 X .020	1140 X 12.7 X .5	1208638PW143	8010738PW145	3842438PW14	3/16" (5 mm)-3/8" (10 mm)		
14/18	44-7/8 X 1/2 X .020	1140 X 12.7 X .5	—	8009938PW14185	3842738PW1418	1/8" (3.2 mm)-5/16"		
18	44-7/8 X 1/2 X .020	1140 X 12.7 X .5	1208838PW183	8010838PW185	3842538PW18	3/32" (2 mm)-1/4" (6 mm)		
24	44-7/8 X 1/2 X .020	1140 X 12.7 X .5	1208938PW243	8010938PW245	3842638PW24	UP TO 1/8" (3.2 mm)		
COMPACT PORTABLE BAND SAW BLADES								
10/14	35-3/8 X 1/2 X .020	900 X 13 X .50	—	1786673	1786678	1/4" (6 mm) & LARGER		
14	35-3/8 X 1/2 X .020	900 X 13 X .50	—	1786674	—	3/16" (5 mm)-3/8" (10 mm)		
18	35-3/8 X 1/2 X .020	900 X 13 X .50	—	1786675	1786680	3/32" (2 mm)-1/4" (6 mm)		
24	35-3/8 X 1/2 X .020	900 X 13 X .50	—	1786676	—	UP TO 1/8" (3.2 mm)		
SUB-COMPACT PORTABLE BAND SAW BLADES								
18	27-1/4 X 1/2 X .020	692.15 X 12.7 X .50	1910012*	*AVAILABLE IN 10 PACK ONLY		—	3/32" (2 mm)-1/4" (6 mm)	
18	27 X 1/2 X .020	685.8 X 13 X .50	LXAPB27183	—	—	—	3/32" (2 mm)-1/4" (6 mm)	



LENOX POWER ARC® CURVED METAL CUTTING JIG SAW BLADES

ADVANCED PERFORMANCE IN METAL CUTTING APPLICATIONS

Curved profile optimizes the angle of attack for fast cutting and longer life cutting metal

Patented T2™ Technology provides fast, efficient cutting in a range of metal cutting applications



SHANK	PRODUCT NO.	TPI	LENGTH X WIDTH X THICKNESS		3 PACK	5 PACK	25 PACK	APPLICATION
			IN	MM				
T	B314TC	14	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	1991595	1991596	-	> 3/32" > 2.4 mm
U	B314UC	14	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	-	1991597	-	
T	B318TC	18	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	1991598	1991599	-	1/16" - 1/4" 1.6 mm - 6.4 mm
U	B318UC	18	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	-	1991600	-	
T	B324TC	24	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	1991601	1991602	-	< 1/8" < 3.2 mm
U	B324UC	24	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	-	1991603	-	

METAL CUTTING JIG SAW BLADES

OPTIMIZED FOR METAL CUTTING APPLICATIONS

Patented T2™ Technology provides fast, efficient cutting in a range of metal cutting applications



SHANK	PRODUCT NO.	TPI	LENGTH X WIDTH X THICKNESS		2 PACK**/3 PACK	5 PACK	25 PACK	APPLICATION
			IN	MM				
T	B408T	8	4 X 3/8 X .050	101.6 X 9.5 X 1.3	-	1991592	-	3/16-5/8" 4.8 mm - 15.9 mm
T	B314T	14	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	1991559	1991560	1991561	> 3/32" > 2.4 mm
U	B314U	14	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	1991563, 1991562**	1991564	-	
T	B514T	14	5-1/4 X 3/8 X 1.3	133.4 X 9.5 X 0.9	1991580	1991591	-	> 3/32" Metal, > 2.4 mm ≤ 3" Pipe, ≤ 76.2 mm
T	B318T	18	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	1991565	1991566	1991567	1/16" - 1/4" 1.6 mm - 6.4 mm
U	B318U	18	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	1991569, 1991568**	1991570	-	
T	B324T	24	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	1991571	1991572	1991573	< 1/8" < 3.2 mm
U	B324U	24	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	1991575, 1991574**	1991576	-	
T	B524T	24	5-1/4 X 3/8 X .037	133.4 X 9.5 X 0.9	1991604	1991605	-	< 1/8" Metal, < 3.2 mm ≤ 2-1/2" Pipe, ≤ 63.5 mm
T	B332T	32	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	1991577	1991578	-	< 1/16" < 1.6 mm
U	B332U	32	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	-	1991579	-	

STAINLESS STEEL CUTTING JIG SAW BLADES

DESIGNED FOR STAINLESS STEEL APPLICATIONS

High performance carbide is welded to the cutting edge for durability and blade life

Fine pitch tooth design delivers smooth, efficient cutting in thin stainless steel and non-ferrous metals

SHANK	PRODUCT NO.	TPI	LENGTH X WIDTH X THICKNESS		1 PACK	3 PACK	5 PACK	1 PACK
			IN	MM				
T	CS318T	18	3-1/4 X 3/8 X .039	82.6 X 9.5 X 1.0	1991616	-	-	5/64" - 3/16" / 2.0 mm - 4.8 mm Stainless 5/64" - 7/32" / 2.0 mm - 5.6 mm Metal

* vs. prior generation LENOX® straight blades



CLEAN WOOD CUTTING JIG SAW BLADES

OPTIMIZED FOR CLEAN CUTS IN SOFT WOOD,
HARD WOOD, AND COMPOSITE

Precision ground teeth with optimized tooth angles provide a clean finish and resist burning

Narrow profile provides clearance to cut tight curves

POWER BLAST
TECHNOLOGY®



SHANK	CODE	TPI	LENGTH X WIDTH X THICKNESS		3-PACK	5-PACK	25-PACK	FINISH	SPEED	APPLICATION	
			IN	MM						PROD NO	PROD NO
T	C456T	6	4X5/16X.058	101.6X7.9X1.5	1990847	1990848	-	II • — II — O — • — O — O	—	3/8"- 1-3/4" 9.5 mm - 44.5 mm	SOFT WOOD
U	C456U	6	4X5/16X.058	101.6X7.9X1.5	1990849	1990850	-	II • — II — O — • — O — • — O	—	3/8"- 1-3/4" 9.5 mm - 44.5 mm	SOFT WOOD
T	C458TL	8	4-5/8X5/16X.058	117.6X7.9X1.5	1991497	1991498	-	II • — II — O — • — O — • — O	—	3/16"- 2-1/4" 4.8 mm - 57.2 mm	SOFT WOOD
T	C450T	10	4X5/16X.058	101.6X7.9X1.5	1990964	1990965	1991381	II • — II — O — • — O — • — O	—	3/16"- 1-1/4" 4.8 mm - 31.8 mm	SOFT WOOD
U	C450U	10	4X5/16X.058	101.6X7.9X1.5	1991382	1991383	-	II • — II — O — • — O — • — O	—	3/16"- 1-1/4" 4.8 mm - 31.8 mm	SOFT WOOD
T	[†] C320TS	20	3-1/2X7/32X.058	88.9X5.6X1.5	1991401	1991402	1991403	II • — II — O — • — O — • — O	—	1/16"- 3/4" 1.6 mm - 19.1 mm	SOFT WOOD
U	[†] C320US	20	3-1/2X7/32X.058	88.9X5.6X1.5	1991404	1991405	-	II • — II — O — • — O — • — O	—	1/16"- 3/4" 1.6 mm - 19.1 mm	SOFT WOOD
T	B456T	6	4X5/16X.058	101.6X7.9X1.5	-	1990703	-	II • — II — O — • — O — • — O	—	3/8"- 1-3/4" 9.5 mm - 44.5 mm	HARD WOOD
U	B456U	6	4X5/16X.058	101.6X7.9X1.5	-	1990846	-	II • — II — O — • — O — • — O	—	3/8"- 1-3/4" 9.5 mm - 44.5 mm	HARD WOOD
T	B450T	10	4X5/16X.058	101.6X7.9X1.5	1990961	1990962	-	II • — II — O — • — O — • — O	—	3/16"- 1-1/4" 4.8 mm - 31.8 mm	HARD WOOD
U	B450U	10	4X5/16X.058	101.6X7.9X1.5	-	1990963	-	II • — II — O — • — O — • — O	—	3/16"- 1-1/4" 4.8 mm - 31.8 mm	HARD WOOD
T	B482T	8/12	4-1/2X3/8X.058	114.3X9.5X1.5	1991478	1991479	-	II • — II — O — • — O — • — O	—	1/8"- 2-1/ 3.2 mm - 57.2 mm	GENERAL WOOD
T	B412T	12	4X5/16X.058	101.6X7.9X1.5	1991614	1991615	-	II • — II — O — • — O — • — O	—	1/8"- 1-1/2" 3.2 mm - 38.1 mm	PLASTIC PVC

EXTRA CLEAN WOOD CUTTING JIG SAW BLADES

OPTIMIZED FOR EXTRA CLEAN CUTS IN SOFT WOOD,
HARD WOOD, AND COMPOSITE

Triple ground teeth with optimized cutting angles provide an extra clean finish and resist burning

Narrow profile provides clearance to cut tight curves

POWER BLAST
TECHNOLOGY®

ON SELECT BLADES



SHANK	PRODUCT NO.	TPI	LENGTH X WIDTH X THICKNESS		3 PACK	5 PACK	25 PACK	FINISH	SPEED	APPLICATION	
			IN	MM						PROD NO	PROD NO
T	B512XT	12	4-1/2X3/8X.058	114.3X9.5X1.5	1991552	1991553	-	II • — II — O — • — O — • — O	—	1/8"- 2", 3.2 mm - 50.8 mm	HARD WOOD
T	[†] B512XTS	12	4-1/2X1/4X.058	114.3X6.4X1.5	1991554	1991555	-	II • — II — O — • — O — • — O	—	1/8"- 2", 3.2 mm - 50.8 mm	HARD WOOD

DOWN CUTTING WOOD JIG SAW BLADES

OPTIMIZED FOR CLEAN CUTS ON TOP OF
WORK PIECES IN SOFT WOOD, HARD WOOD, AND COMPOSITE

Reverse teeth cut on the down stroke to provide clean cuts on top of the material

Precision ground teeth with optimized tooth angles provide a clean finish

POWER BLAST
TECHNOLOGY®



SHANK	PRODUCT NO.	TPI	LENGTH X WIDTH X THICKNESS		3 PACK	5 PACK	25 PACK	FINISH	SPEED	APPLICATION	
			IN	MM						PROD NO	PROD NO
T	C450DT	10	4X5/16X.058	101.6X7.9X1.5	1991386	1991387	1991388	II • — II — O — • — O — • — O	—	3/16"- 1-1/4" 4.8 mm - 31.8 mm	SOFT WOOD
U	C450DU	10	4X5/16X.058	101.6X7.9X1.5	1991389	1991390	-	II • — II — O — • — O — • — O	—	3/16"- 1-1/4" 4.8 mm - 31.8 mm	HARD WOOD
T	B450DT	10	4X5/16X.058	101.6X7.9X1.5	1991384	1991385	-	II • — II — O — • — O — • — O	—	3/16"- 1-1/4" 4.8 mm - 31.8 mm	HARD WOOD

[†]Blade does not feature Power Blast Technology®

LAMINATE CUTTING JIG SAW BLADES

OPTIMIZED FOR CLEAN CUTS IN HARD WOOD AND LAMINATE

Pointed ground teeth cut on the up and down stroke to provide a clean finish on both sides of the material

Narrow profile provides clearance to cut tight curves

POWER BLAST
TECHNOLOGY®
ON SELECT BLADES



SHANK	PRODUCT NO.	TPI	LENGTH X WIDTH X THICKNESS		3 PACK	5 PACK	25 PACK	FINISH	SPEED	APPLICATION
			IN	MM	PROD NO	PROD NO	PROD NO			
T	B314LT	14	3-1/2 X 5/16 X .058	88.9 X 7.9 X 1.5	-	1991613	-	II ---● II	⌚	1/8" - 3/4" 3.2 mm - 19.1 mm SOFT WOOD
T	*B320TS	20	3-1/2 X 7/32 X .058	88.9 X 5.6 X 1.5	1991611	1991612	-	II ---● II	⌚●	1/16" - 3/4" 1.6 mm - 19.1 mm CONTOUR WOOD

STRAIGHT CUTTING WOOD JIG SAW BLADES

OPTIMIZED FOR STRAIGHT CUTS IN SOFT WOOD,
HARD WOOD, AND COMPOSITE

Thick backing resists blade deflection for straight, square cuts and accurate angles when making cutouts in hard, thick material

POWER BLAST
TECHNOLOGY®



SHANK	PRODUCT NO.	TPI	LENGTH X WIDTH X THICKNESS		3 PACK	5 PACK	25 PACK	FINISH	SPEED	APPLICATION
			IN	MM	PROD NO	PROD NO	PROD NO			
T	C416TP	6	4 X 5/16 X .062	101.6 X 7.9 X 1.6	1991556	1991557	-	II ---● II	⌚	1/4" - 2" 6.4 mm - 50.8 mm SOFT WOOD
T	C416TLP	6	6 X 5/16 X .062	152.4 X 7.9 X 1.6	-	1991558	-	II ---● II	⌚●	1/4" - 4" 6.4 mm - 101.6 mm SOFT WOOD

FAST CUTTING WOOD JIG SAW BLADES

OPTIMIZED FOR FAST, EASY CUTS IN SOFT WOOD,
HARD WOOD, AND COMPOSITE

Tooth design removes chips for fast, efficient cutting when making cutouts, roughing in utilities, or cutting material to length

POWER BLAST
TECHNOLOGY®



SHANK	PRODUCT NO.	TPI	LENGTH X WIDTH X THICKNESS		3 PACK	5 PACK	25 PACK	FINISH	SPEED	APPLICATION
			IN	MM	PROD NO	PROD NO	PROD NO			
T	C416T	6	4 X 5/16 X .058	101.6 X 7.9 X 1.5	1991482	1991494	1991495	II ---● II	⌚	1/4" - 2" 6.4 mm - 50.8 mm SOFT WOOD
U	C416U	6	4 X 5/16 X .058	101.6 X 7.9 X 1.5	-	1991496	-	II ---● II	⌚	6.4 mm - 50.8 mm
T	C416TL	6	6 X 5/16 X .058	152.4 X 7.9 X 1.5	1991500	1991551	-	II ---● II	⌚	1/4" - 4" 6.4 mm - 101.6 mm SOFT WOOD
T	C416TSt	6	4 X 1/4 X .058	101.6 X 6.4 X 1.5	-	1991477	-	II ---● II	⌚	1/4" - 2" 6.4 mm - 50.8 mm SOFT WOOD
T	B416T	6	4 X 5/16 X .058	101.6 X 7.9 X 1.5	-	1991481	-	II ---● II	⌚	1/4" - 2" 6.4 mm - 50.8 mm HARD WOOD
T	B416TL	6	6 X 5/16 X .058	152.4 X 7.9 X 1.5	-	1991499	-	II ---● II	⌚	1/4" - 4" 6.4 mm - 101.6 mm HARD WOOD

*Blade does not feature Power Blast Technology®

JIG SAW BLADE KITS

1994573

12 PIECE

T-SHANK GENERAL PURPOSE KIT

Includes Storage Case



LENGTH X WIDTH X THICKNESS

QTY	PROD NO.	TPI	IN	MM	APP.
2	C450T	10	4X 5/16 X .058	101.6 X 7.9 X 1.5	SOFT WOOD
2	C450DT	10	4X 5/16 X .058	101.6 X 7.9 X 1.5	SOFT WOOD
2	C416TP	6	4X 5/16 X .062	101.6 X 7.9 X 1.6	SOFT WOOD
2	B314T	14	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	
2	B324T	24	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	
1	B680T	10	5-1/4 X 3/8 X .050	133.4 X 9.5 X 1.3	
1	B482T	8/12	4-1/2 X 3/8 X .058	114.3 X 9.5 X 1.5	GENERAL WOOD

1994575

18 PIECE

T-SHANK GENERAL PURPOSE KIT

Includes Storage Case



LENGTH X WIDTH X THICKNESS

QTY	PROD NO.	TPI	IN	MM	APP.
3	C450T	10	4X 5/16 X .058	101.6 X 7.9 X 1.5	SOFT WOOD
3	C450DT	10	4X 5/16 X .058	101.6 X 7.9 X 1.5	SOFT WOOD
3	C416TP	6	4X 5/16 X .062	101.6 X 7.9 X 1.6	SOFT WOOD
3	B314T	14	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	
3	B324T	24	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	
1	B680T	10	5-1/4 X 3/8 X .050	133.4 X 9.5 X 1.3	
2	B482T	8/12	4-1/2 X 3/8 X .058	114.3 X 9.5 X 1.5	GENERAL WOOD

1994574

12 PIECE

T-SHANK GENERAL PURPOSE KIT

Includes Compact Fabric Case



LENGTH X WIDTH X THICKNESS

QTY	PROD NO.	TPI	IN	MM	APP.
2	C450T	10	4X 5/16 X .058	101.6 X 7.9 X 1.5	SOFT WOOD
2	C416T	6	4X 5/16 X .058	101.6 X 7.9 X 1.5	SOFT WOOD
2	C320TS	20	3-1/2 X 7/32 X .058	88.9 X 5.6 X 1.5	
2	B314T	14	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	
2	B324T	24	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	
2	B482T	8/12	4-1/2 X 3/8 X .058	114.3 X 9.5 X 1.5	GENERAL WOOD

1994458

10 PIECE

T-SHANK GENERAL PURPOSE KIT

Includes Storage Case



LENGTH X WIDTH X THICKNESS

QTY	PROD NO.	TPI	IN	MM	APP.
2	C450T	10	4X 5/16 X .058	101.6 X 7.9 X 1.5	SOFT WOOD
2	C416T	6	4X 5/16 X .058	101.6 X 7.9 X 1.5	SOFT WOOD
2	C320TS	20	3-1/2 X 7/32 X .058	88.9 X 5.6 X 1.5	
2	B314T	14	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	
2	B324T	24	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	

1994459

10 PIECE

U-SHANK GENERAL PURPOSE KIT

Includes Storage Case



LENGTH X WIDTH X THICKNESS

QTY	PROD NO.	TPI	IN	MM	APP.
2	C450U	10	4X 5/16 X .058	101.6 X 7.9 X 1.5	SOFT WOOD
2	C416U	6	4X 5/16 X .058	101.6 X 7.9 X 1.5	SOFT WOOD
2	C320US	20	3-1/2 X 7/32 X .058	88.9 X 5.6 X 1.5	
2	B314U	14	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	
2	B324U	24	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	

1994355

3 PIECE

T-SHANK LAMINATE KIT



LENGTH X WIDTH X THICKNESS

QTY	PROD NO.	TPI	IN	MM	APP.
1	B320TS	20	3-1/2 X 7/32 X .058	88.9 X 5.6 X 1.5	
2	B314LT	14	3-1/2 X 5/16 X .058	88.9 X 7.9 X 1.5	

1994456

5 PIECE

T-SHANK GENERAL PURPOSE KIT



LENGTH X WIDTH X THICKNESS

QTY	PROD NO.	TPI	IN	MM	APP.
1	C450T	10	4X 5/16 X .058	101.6 X 7.9 X 1.5	SOFT WOOD
1	C416T	6	4X 5/16 X .058	101.6 X 7.9 X 1.5	SOFT WOOD
1	C320TS	20	3-1/2 X 7/32 X .058	88.9 X 5.6 X 1.5	
1	B314T	14	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	
1	B324T	24	3-5/8 X 3/8 X .037	92.2 X 9.5 X 0.9	



JIG SAW BLADE SELECTION GUIDE


	WOOD	LAMINATE	PLASTICS & COMPOSITES	NAIL EMBEDDED WOOD	NON-FERROUS METAL	METAL	STAINLESS STEEL	DRYWALL/PLASTER	CEMENT BOARD	ABRASIVES	TILE & GRANITE
BEST	BI-METAL				CARBIDE STRIP	POWER ARC®	CARBIDE STRIP	CARBIDE TIPPED		LENOX DIAMOND™	
BETTER	HIGH CARBON STEEL			—	BI-METAL		POWER ARC®	BI-METAL	LENOX DIAMOND™	CARBIDE GRIT	
GOOD	—			—	—	—	BI-METAL	—	—	—	—

TEETH PER INCH SELECTION GUIDE

1"

6 TPI	10 TPI	12 TPI	14 TPI	18 TPI	24 TPI	32 TPI	GRIT
ROUGH ←	CUT QUALITY					→ SMOOTH	
FAST ←	CUT SPEED					→ SLOW	
WOOD 1/16" – 4" (1.6 mm–101.6 mm)							
GENERAL PURPOSE 5/16" – 3-1/2" (7.9 mm–88.9 mm)		MEDIUM METAL 1/16" – 1/4" (1.6 mm–6.4 mm)					
THICK METAL > 3/32" (2.4 mm)		THIN METAL < 1/8" (3.2 mm)		ABRASIVES		EXTRA THIN METAL < 1/16" (1.6 mm)	

BLADE LENGTH SELECTION GUIDE

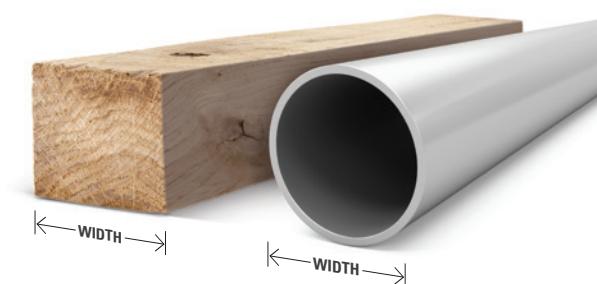

TIP Always keep 2-3 teeth in the material at all times

Example: Clean, Scroll Cut in 3/4" (19 mm) Wood = 3/4" (19 mm) Width + 2-5/8" (67 mm) Adder = 3-3/8" (86 mm) Minimum Blade Length
Straight Cut in 1" (25 mm) Pipe= 1" (25 mm) Width + 2-3/4" (70 mm) Adder = 3-3/4" (95 mm) Minimum Blade Length

WOOD + PLASTICS & COMPOSITES METAL

FINISH	CLEAN		ROUGH	N/A
CUT	STRAIGHT	SCROLL	STRAIGHT OR SCROLL	STRAIGHT OR SCROLL
APPLICATION ADDER (IN)	2-1/2	2-5/8	2	2-3/4
APPLICATION ADDER (MM)	64	67	51	70

T-SHANK SAW BLADES CROSS REFERENCE CHART


		LENGTH		TPI	IN	MM	DESC	MATERIAL	SHAPE	DEWALT®	BOSCH®	STARRETT®	MAKITA®
LEN		TP	IN										
LENOX POWER ARC® METAL CUTTING	14						B314TC		-	-	-	-	
	18						B318TC		-	-	-	-	
	3-5/8	92.2					B324TC		-	-	-	-	
	24						B314T		-	-	-	-	
	14						B514T		-	T118B3, T118BF3, T123X3, T121AF3	BU214-2	-	
	5-1/4	133.4					B318T		DW3770-5	T118B, T118BF	BU214	792474-6	
	18						B324T		DW3770B50	T118B100	BU214-20	-	
	3-5/8	92.2					B332T		-	T318B3, T321AF3	-	-	
	24						B408T		-	T318B	-	-	
METAL CUTTING	5-1/4	133.4					B524T		-	T318B100	-	-	
	32	3-5/8	92.2				B456T		-	T118A3, T118AF3	BU218-2, BU418-2	792473-8, 792467-3, 792466-5	
	8	4	101.6				C456T		DW3774-5	T118A, T118E, T118AF, T118EF, T118EFS	BU218, BU418		
	6	4	101.6				C458TL		DW3774B50	T118A100, T118AF100, T118EFS100	BU218-20, BU418-20 BU224-2, BU424-2		
	8	4-5/8	117.6				C450T		-	T118A3, T118AF3	-		
	10	4	101.6				C320TS		DW3776-5	T118A, T118AF	BU224, BU424	792478-8, 792428-3	
	20	3-1/2	88.9				B456T		DW3776B50	T118A100, T118AF100	BU224-20, BU424-20		
	6	4	101.6				BIMETAL		-	T318A3	-		
									-	T318A	-	-	
CLEAN WOOD									-	T318A100	-	-	
									-	T118G3	-	-	
									DW3778-5	T118G	BU232	792475-4	
									DW3778B50	-	BU232-20	-	
									DW3755H2	-	-	-	
									DW3755H, DW3755-5	T127D	-	-	
									DW3755H50	-	-	-	
									DW3753H2	T101D3	-	-	
									DW3753H	T101D, T101DP	-	792464-9	
CARBON									-	T101D100	-	-	
									-	T301CD3	-	-	
									-	T301CD, T301DL	-	-	
									DW3760H2	T101B3	-	-	
									DW3760H	T101B	-	792529-7, 792463-1	
									DW3760H50	T101B100	-	-	
									DW3765H2	T101A03	-	-	
									DW3765H	T101A0	-	-	
									-	T101A0100	-	-	
ALUMINUM									DW3753-5	T101DF	BU36T	-	
									-	-	BU36T-20	-	

BOSCH is a registered trademark of Robert Bosch GMBH
 STARRETT is a registered trademark of the I.S. Starrett Company
 MAKITA is a registered trademark of Makita Corporation

LENGTH										
	TPI	IN	MM	DESC	MATERIAL	SHAPE	DEWALT®	BOSCH®	STARRETT®	MAKITA®
CLEAN WOOD	10	4	101.6	B450T		LENOX CLEAN HARDWOOD	-	T101BF3	-	-
	8-12	4-1/2	114.3	B482T		LENOX GENERAL WOOD	DW3760-5 -	T101BF -	BU310T BU310T-20	-
PLASTIC	4	101.6	B412T		BIMETAL	LENOX PLASTIC	-	T102BF3	-	-
						LENOX EXTRA CLEAN WOOD	-	T102BF	-	-
EXTRA CLEAN WOOD	12	4-1/2	114.3	B512XT		LENOX EXTRA CLEAN WOOD	-	T308B3, T308BF3	-	-
	LENOX EXTRACLEAN SCROLLWOOD					-	T308B, T308BF, T308BP	-	-	
DOWN CUT WOOD	10	4	101.6	C450DT	CARBON	LENOX DOWNCUT SOFT WOOD	DW3762H2	T101BR3	-	-
						LENOX DOWNCUT HARD WOOD	DW3762H	T101BR	-	-
LAMINATE	14	3-1/2	88.9	B314LT	BIMETAL	LENOX LAMINATE	DW3762H50	T101BR100	-	-
	20					LENOX SCROLL LAMINATE	DW3762-5	T101BRF	BU310DT	792471-2
STRAIGHT CUT WOOD	4	101.6	C416TP			LENOX STRAIGHT CUT SOFT WOOD	-	-	BU310DT-20	-
						LENOX STRAIGHT CUT SOFT WOOD	-	T101BIF	-	-
FAST WOOD	6	152.4	C416TLP		CARBON	LENOX FAST SOFT WOOD	-	T101A0F3	BU3DC-2	-
						LENOX FAST SOFT WOOD	DW3765-5	T101AOF	-	-
GENERAL PURPOSE	4	101.6	C416T			LENOX FAST SOFT WOOD	-	T144DP3	-	-
						LENOX FAST SOFT WOOD	DW3751-5	T144DP	-	-
GENERAL PURPOSE	6	152.4	C416TL			LENOX FAST SOFT WOOD	DW3750H2	T144D3	-	-
						LENOX FAST SOFT WOOD	DW3750H	T144D	-	-
GENERAL PURPOSE	4	101.6	C416TS			LENOX FAST SOFT WOOD	DW3750H50	T144D100	-	-
						LENOX FAST SOFT WOOD	-	T344D3	-	-
GENERAL PURPOSE	4	101.6	B416T		BIMETAL	LENOX FAST SOFT WOOD	-	T344D	-	-
						LENOX FAST SOFT WOOD	DW3750-5	T244D	-	792469-9
GENERAL PURPOSE	4	101.6	B416TL			LENOX FAST SOFT WOOD	-	T244D100	-	-
						LENOX FAST SOFT WOOD	-	T344DF	-	-
GENERAL PURPOSE	4	101.6	B406T			LENOX NAIL EMBEDDED	-	T111C3	-	-
						LENOX NAIL EMBEDDED	-	T111C, T111CF	-	-
GENERAL PURPOSE	4	101.6	B406T			LENOX NAIL EMBEDDED	-	T111C100	-	-

BOSCH is a registered trademark of Robert Bosch GMBH
 STARRETT is a registered trademark of the I.S. Starrett Company

LENGTH										
	TPI	IN	MM	DESC	MATERIAL	SHAPE	DEWALT®	BOSCH®	STARRETT®	MAKITA®
CARBIDE GRIT	DIAMOND GRIT	CARBIDE STRIP	CARBIDE TIPPED	GENERAL PURPOSE						
Grit	10	5-1/4	133.4	B680T	BIMETAL		—	T345XF3	—	—
	6	4	101.6	CT456T			—	T345XF	—	—
	18	3-1/4	82.6	CS318T			—	T345XF100	—	—
				DG300T	DIAMOND		—	T141HM1	—	—
				G300T			—	T118EHM1	—	—
							—	T130DG	—	—
Grit	3-1/2	88.9					—	T130RF1, T150RF1	—	—
	3-1/2	88.9					—	T150RF3	—	—
							DW3768-5	T150RF	BU230X	—
							—	—	BU230X-20	—

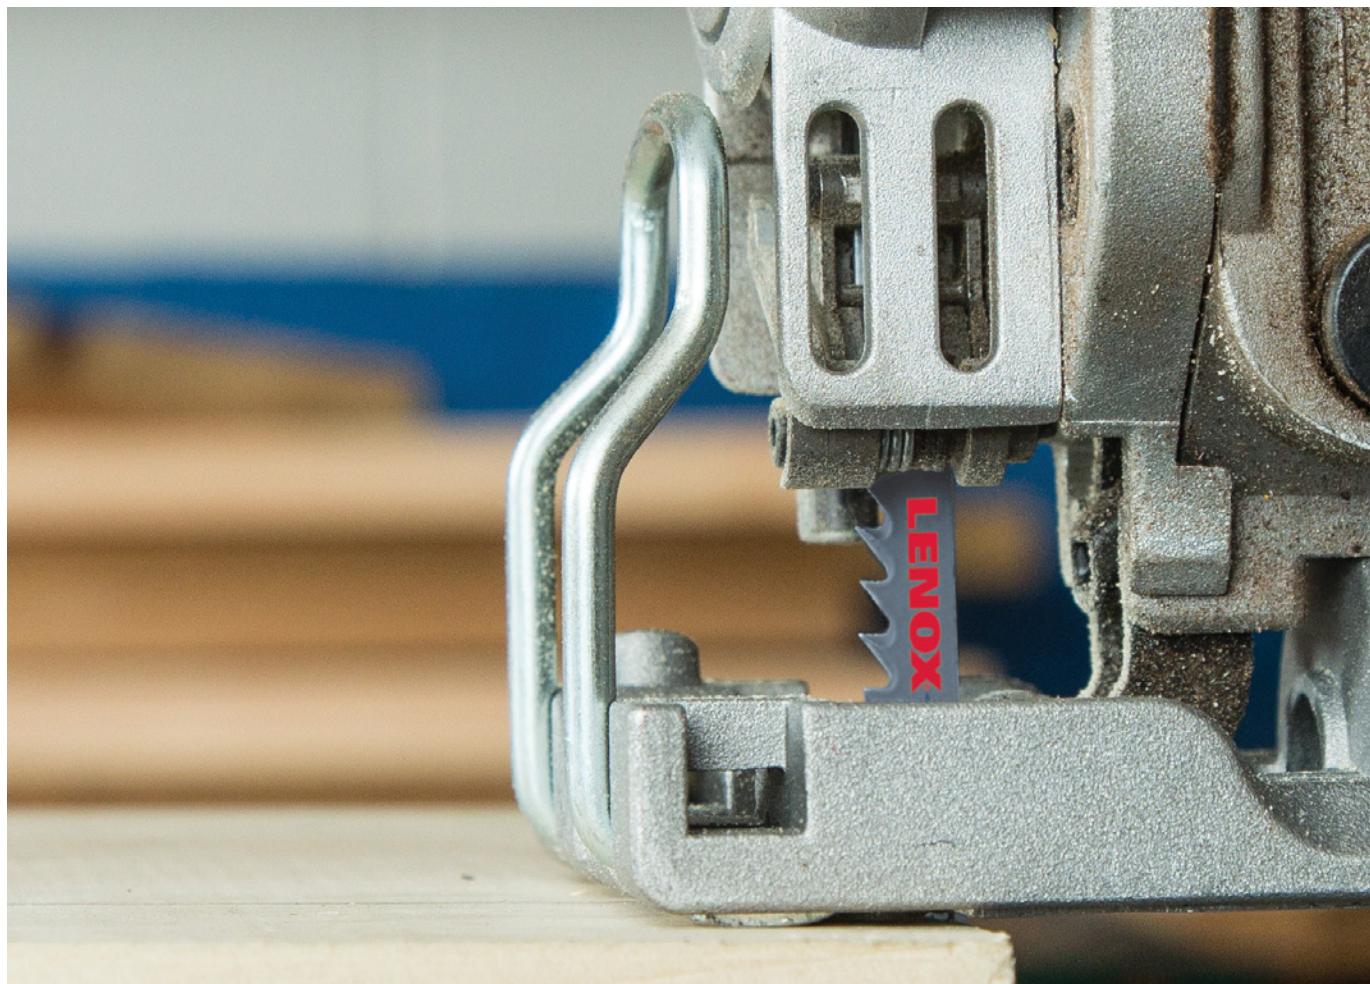

BOSCH is a registered trademark of Robert Bosch GMBH
STARRETT is a registered trademark of the I.S. Starrett Company




U-SHANK SAW BLADES CROSS REFERENCE CHART


	LENGTH										
	TPI	IN	MM	DESC	MATERIAL	SHAPE	DEWALT®	BOSCH®	STARRETT®	MAKITA®	
LENOX POWER ARC® METAL CUTTING	14			B314UC	BIMETAL		—	—	—	—	
	18	3-5/8	92.2	B318UC			—	—	—	—	
	24			B324UC			—	—	—	—	
	14	3-5/8	92.2	B314U			DW3720H2	U118B3	—	—	
	18	3-5/8	92.2	B318U			DW3720-5	U118B, U118BF, U123X	—	—	
	24	3-5/8	92.2	B324U			DW3720B50	—	—	—	
	32	3-5/8	92.2	B332U			DW3724H2	U118A3, U118E3	—	—	
	6	4	101.6	C456U	CARBON		DW3724-5	U118A, U118E, U118AF, U118EF	—	—	
	10	4	101.6	C450U			DW3724B50	—	—	—	
CLEAN WOOD	20	3-1/2	88.9	C320US			DW3726H2	U118A3	—	—	
	6	4	101.6	B456U			DW3726B50	U118A, U118AF	—	—	
	10	4	101.6	B450U			DW3728H2	—	—	—	
	6	4	101.6		BIMETAL		DW3703H2	U101D3	—	—	
	10	4	101.6				DW3703H	U101D	—	—	
	20	3-1/2	88.9				DW3703H50	—	—	—	

BOSCH is a registered trademark of Robert Bosch GMBH

STARRETT is a registered trademark of the I.S. Starrett Company

MAKITA is a registered trademark of Makita Corporation

	LENGTH					SHAPE	DEWALT®	BOSCH®	STARRETT®	MAKITA®
	TPI	IN	MM	DESC	MATERIAL					
GENERAL PURPOSE	6	4	101.6	C416U	CARBON		DW3712H2	U101BR3	—	—
							DW3712H	U101BR	—	—
GENERAL PURPOSE	6	4	101.6	B406U	BIMETAL		DW3700H2, DW3701H2	—	—	—
							DW3700H50	U144D	—	—
CARBIDE GRIT	10	5-1/4	133.4	B680U	CARBIDE		—	U111C3	—	—
							—	U111C	—	—
CARBIDE GRIT	Grit	3-1/2	88.9	G300U	CARBIDE		—	U345XF3	—	—
							DW3718-5	U150RF3	—	—

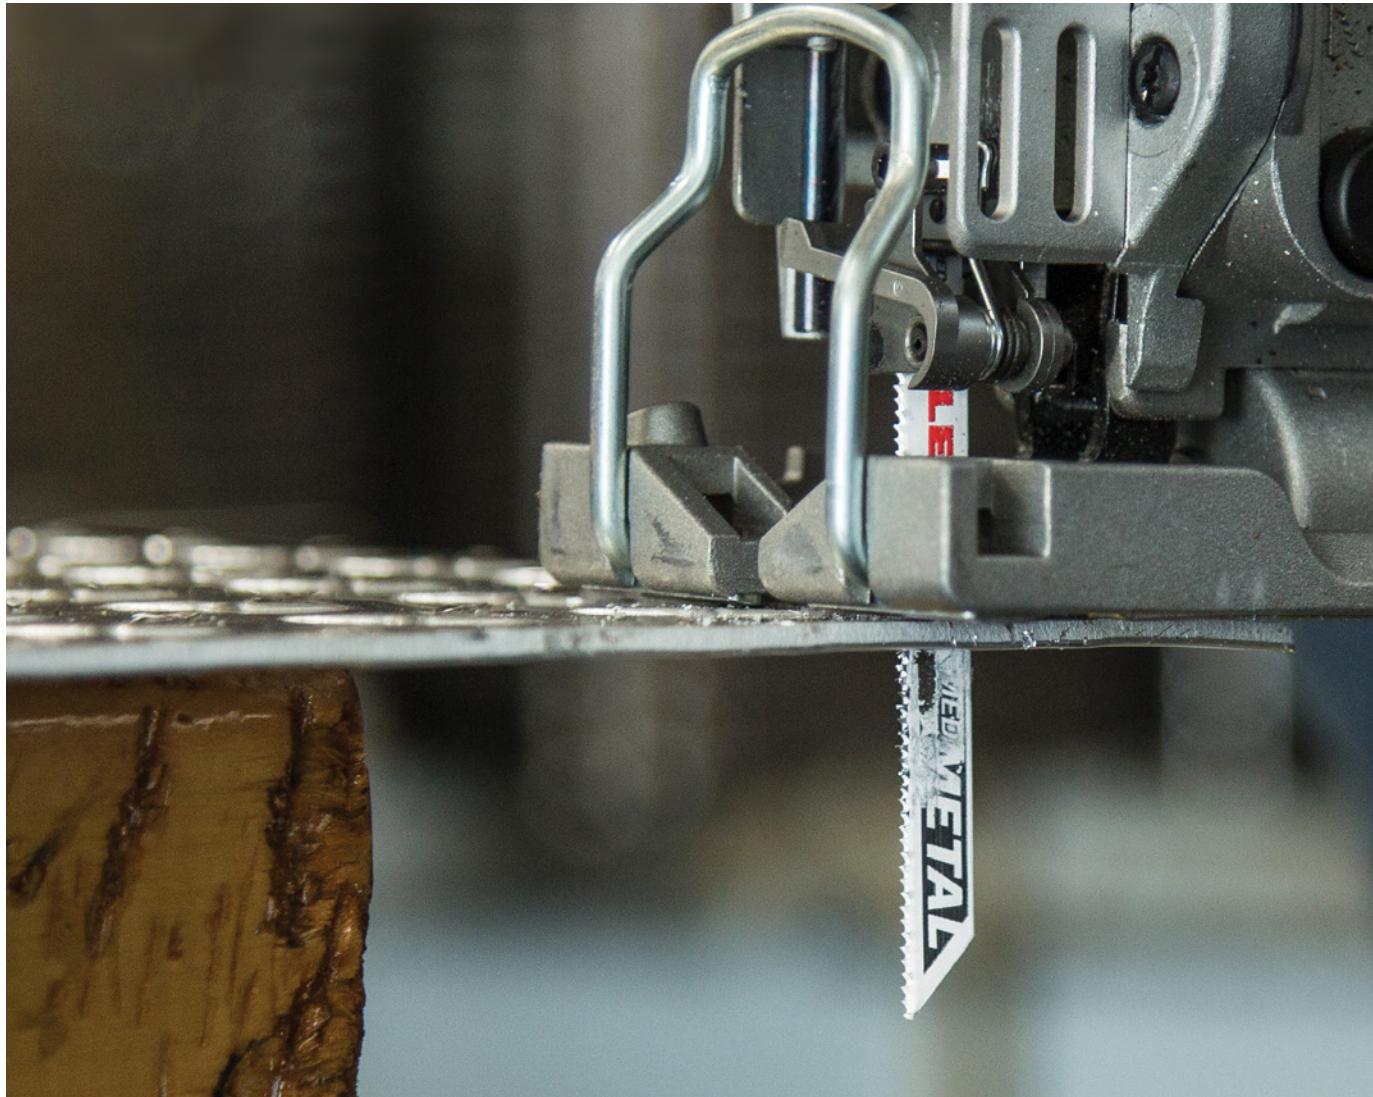

BOSCH is a registered trademark of Robert Bosch GMBH
STARRETT is a registered trademark of the I.S. Starrett Company



METAL CUTTING CIRCULAR SAW BLADES

TITANIUM CARBIDE COMPOSITE TEETH

Designed for long life

CLEAN, COOL CUTS

Designed to keep blade cool

PRECISION MANUFACTURING

Laser cut blade to minimize warping



	DIAMETER					ARBOR		APPLICATION
	IN	MM	PROD NO	TOOTH COUNT		IN	MM	
STEEL	5-3/8	135	21876ST538030CT	30	3500	—	20	
	7-1/4	184	21881ST714040CT	40	5800	5/8	16	Structurals
	8	203	21884ST800050CT	50	5800	5/8	16	Thick Walled Pipe
	10	254	21886ST100052CT	52	5200	5/8	16	Threaded Rod
	12	305	21888ST120060CT	60	1500	1	25.4	Channel Steel
	14	355	21891ST140080CT	80	1800	1	25.4	Plate
THIN STEEL	6-1/2	165	21877TS612048CT	48	5800	5/8	16	Solid Steel
	7-1/4	184	21883TS714068CT	68	5800	5/8	16	Sheet Metal
	12	305	21890TS120080CT	80	1500	1	25.4	Thin Walled Pipe
ALUMINUM	7-1/4	184	21882AL714060CT	60	5800	5/8	16	Metal Roofing
	10	254	21887AL100080CT	80	5200	5/8	16	Metal Decking
	12	305	21889AL120080CT	80	4000	1	25.4	Aluminum
								Copper Brass



LENOX METALMAX® CUT-OFF WHEELS

A NEW ALTERNATIVE TO ABRASIVE CUT-OFF WHEELS

1,000+ CUTS

METALMAX® delivers 1,000 or more cuts with no need for wheel changes.*

LONG LIFE

Diamondt technology provides extreme durability in metal cutting applications, leading to fewer wheel changes, when compared to thin bonded cut-off wheels.

PRECISION AND REACH

METALMAX® is designed to maintain a consistent cutting depth through the duration of its life, unlike a bonded abrasive wheel.



*Average performance in 1" carbon steel square tube

†This blade uses manufactured diamonds engineered for cutting



LENOX METALMAX™ RANGE - TYPE 1 CUT-OFF WHEELS

PRODUCT DIMENSIONS

PROD NO	DIAMETER	THICKNESS	ARBOR	OPTIONAL ARBOR ADJUSTMENT	POWER TOOL TYPE	RPM MAX
1972914	1.5"	.050"	3/8"	1/4"	Die Grinder	40200
1972917	2"	.050"	3/8"	1/4"	Die Grinder	30500
1972918	3"	.050"	3/8"	1/4"	Die Grinder	20300
1972919	4"	.050"	3/8"	1/4"	Die Grinder	15200
1972920	4"	.050"	5/8"	1/4"	Angle Grinder	15200
1972921	4.5"	.050"	7/8"	—	Angle Grinder	13200
1972922	5"	.050"	7/8"	—	Angle Grinder	12200
1972923	6"	.050"	7/8"	Diamond Knock Out	Angle Grinder/Circular Saw	10100
1972924	7"	.060"	7/8"	Diamond Knock Out	Angle Grinder/Circular Saw	8400
1972925	8"	.060"	5/8"	Diamond Knock Out	Circular Saw	7600
1972926	10"	.100"	5/8"	—	Stationary/Small Chop Saw	4300
1972927	12"	.130"	1"	—	Chop Saw	4300
1972929	14"	.130"	1"	—	Chop Saw	4300

LENOX METALMAX™ RANGE - TYPE 27 CUT-OFF WHEELS

PRODUCT DIMENSIONS

PROD NO	DIAMETER	THICKNESS	ARBOR	POWER TOOL TYPE	RPM MAX
2044467	4.5"	.050"	7/8"	Angle Grinder	13200
2044470	6"	.050"	7/8"	Angle Grinder	10100
2044481	7"	.060"	7/8"	Angle Grinder	8400

ONE WHEEL, MULTIPLE MATERIALS

LENOX METALMAX® is recommended for multiple types of metal including steel, sheet metal, stainless steel, rebar, cast iron, aluminum** and non-ferrous metals.



**When cutting Aluminum, it is recommended to use LENOX LUBE® (68020LNX) or some form of saw lubricant to avoid chip welding.



MULTI-MATERIAL CARBIDE TIPPED HOLE SAWS

FOR FAST, ROUGH-IN DRILLING IN CLEAN WOOD, NAIL-EMBEDDED WOOD, CONCRETE BLOCK, FIBER CEMENT, AND BRICK

UP TO 6X FASTER*

Large carbides and aggressive tooth design cuts through material faster for rough-in applications*

RIPS THROUGH NAILS**

High performance carbides are brazed to the cutting edge for durability and to help prevent tooth loss when hitting nails or drilling through abrasive materials

VERSATILE DESIGN

Carbide teeth are optimized to cut through a variety of materials including Nail-Embedded Wood, Concrete Block, Fiber Cement, and Brick

*vs LENOX® Bi-metal Hole Saw Cutting 2" Thick Pressure-Treated Wood

**Based on 2-9/16" Hole Saw Cutting Nail-Embedded Wood



CARBIDE TIP™

UP TO 6X FASTER™

1 PER PACK	DIAMETER		CUTTING DEPTH		APPLICATION	SNAP-BACK™	STANDARD
PROD NO	IN	MM	IN	MM			
LXA4138	1 3/8	35	2.45	62	1" Supply Lines, <1" Pipe & Fitting	2L, 6L	2L, 3L, OR 6L
LXA4134	1 3/4	44	2.45	62	Insulated Supply Lines, 1" Pipe & Fitting	2L, 6L	2L, 3L, 6L, OR 7L
LXA4218	2 1/8	54	2.45	62	1 1/2" Pipe	2L, 6L	2L, 3L, 6L, OR 7L
LXA42141	2 1/4	57	2.45	62	1-1/2" Pipe & Fitting	2L, 6L	2L, 3L, 6L, OR 7L
LXA429162	2 9/16	65	2.45	62	2" Pipe	2L, 6L	2L, 3L, 6L, OR 7L
LXA42342	2 3/4	70	2.45	62	2" Pipe & Fitting	2L, 6L	2L, 3L, 6L, OR 7L
LXA431	3	76	2.45	62	2-1/2" Pipe	2L, 6L	2L, 3L, 6L, OR 7L
LXA4358	3 5/8	92	2.45	62	3" Pipe	2L, 6L	2L, 3L, 6L, OR 7L
LXA44	4	102	2.45	62	3" Pipe & Fitting, Dryer Vent	2L, 6L	2L, 3L, 6L, OR 7L
LXA4414	4 1/4	108	2.45	62	4" Duct Pipe & Bendable Duct Pipe	2L, 6L	2L, 3L, 6L, OR 7L
LXA4458	4 5/8	117	2.45	62	4" Pipe	2L, 6L	2L, 3L, 6L, OR 7L
LXA4614	6 1/4	159	2.45	62	6" Duct Pipe	2L, 6L	2L, 3L, 6L, OR 7L

MULTI-MATERIAL HOLE SAW ARBOR & PILOT BITS

PROD NO	DESCRIPTION	SIZES		SHANK SIZE	
		IN	MM	IN	MM
LXA9123PBM	2L Multi-Material SNAP-BACK™	1-1/4–6-1/4	31.8–158.8	1/2 & Larger	12.7 & Larger
PROD NO	DESCRIPTION	CHUCK SIZE		FITS ARBOR	
PROD NO	DESCRIPTION	IN	MM	SNAP-BACK™	SOLID HEX
LXA93341PB	3-3/4" Multi-Material Pilot (1 pack)	1/4	6.4	2L, 5L, 6L	1L, 2L, 3L, 4L, 5L, 6L, 7L
LXA93342PB	3-3/4" Self-Feed Pilot (1 pack)	1/4	6.4	2L, 5L, 6L	1L, 2L, 3L, 4L, 5L, 6L, 7L



MULTI-MATERIAL CARBIDE TIPPED HOLE SAW KITS

LXA47SET

7 PIECE

2-1/8", 2-9/16", 3-5/8"

Arbors: 2L SNAP-BACK™ with Self-Feed Pilot

3 Multi-Material Pilot Bits

LARGE KIT



LXA411SET

11 PIECE

2-1/8", 2-1/4", 2-9/16", 2-3/4", 3-5/8", 4", 4-5/8"

Arbors: 2L SNAP-BACK™ with Self-Feed Pilot

3 Multi-Material Pilots

LARGE KIT



SPEED SLOT® CARBIDE TIPPED HOLE SAWS

FOR DRILLING HOLES IN WOOD, STEEL, STAINLESS STEEL,
CAST IRON & ABRASIVE MATERIALS

UP TO 50X LIFE*

High performance carbides are welded to the cutting edge for durability and to help prevent tooth loss

FAST, EASY PLUG REMOVAL

SPEED SLOT® staircase design has multiple leverage points for easy plug ejection

EXTREMELY VERSATILE

Aggressive tooth design drills through wood, steel, stainless steel, cast iron, fiber cement and plaster

*vs LENOX® Bi-Metal Hole Saw cutting cast iron



CARBIDE TIP™

UP TO 50X LIFE™

1 PER PACK	DIAMETER		PIPE TAP		PIPE ENTRANCE		USE ARBOR	
PROD NO	IN	MM	IN	MM	IN	MM	SNAP-BACK™	STANDARD
LXAH3116	11/16	17.5	—	—	—	—	5L	1L, 4L, 5L
LXAH334	3/4	19.1	1/2	12.7	3/8	9.5	5L	1L, 4L, 5L
LXAH378	7/8	22.2	3/4	19.1	1/2	12.7	5L	1L, 4L, 5L
LXAH31	1	25.4	—	—	—	—	5L	1L, 4L, 5L
LXAH3118	1-1/8	28.6	1	25.4	3/4	19.1	5L	1L, 4L, 5L
LXAH3114	1-1/4	31.8	—	—	—	—	2L, 6L	2L, 3L 6L
LXAH3138	1-3/8	34.9	—	—	1	25.4	2L, 6L	2L, 3L 6L
LXAH3112	1-1/2	38.1	1-1/4	31.8	—	—	2L, 6L	2L, 3L, 6L, 7L
LXAH3158	1-5/8	41.3	—	—	—	—	2L, 6L	2L, 3L, 6L, 7L
LXAH3134	1-3/4	44.5	1-1/2	38.1	1-1/4	31.8	2L, 6L	2L, 3L, 6L, 7L
LXAH32	2	50.8	—	—	1-1/2	38.1	2L, 6L	2L, 3L, 6L, 7L
LXAH3218	2-1/8	54.0	—	—	—	—	2L, 6L	2L, 3L, 6L, 7L
LXAH3214	2-1/4	57.2	2	50.8	—	—	2L, 6L	2L, 3L, 6L, 7L
LXAH3238	2-3/8	60.3	—	—	—	—	2L, 6L	2L, 3L, 6L, 7L
LXAH3212	2-1/2	63.5	—	—	2	50.8	2L, 6L	2L, 3L, 6L, 7L
LXAH32916	2-9/16	65.1	—	—	—	—	2L, 6L	2L, 3L, 6L, 7L
LAH3258	2-5/8	66.7	2-1/2	63.5	—	—	2L, 6L	2L, 3L, 6L, 7L
LXAH321116	2-11/16	68.3	—	—	—	—	2L, 6L	2L, 3L, 6L, 7L
LXAH3	3	76.2	—	—	2-1/2	63.5	2L, 6L	2L, 3L, 6L, 7L
LXAH3314	3-1/4	82.6	3	76.2	—	—	2L, 6L	2L, 3L, 6L, 7L
LXAH3338	3-3/8	85.7	—	—	—	—	2L, 6L	2L, 3L, 6L, 7L
LXAH3312	3-1/2	88.9	—	—	—	—	2L, 6L	2L, 3L, 6L, 7L
LXAH3358	3-5/8	92.1	—	—	3	76.2	2L, 6L	2L, 3L, 6L, 7L
LXAH3334	3-3/4	95.3	3-1/2	88.9	—	—	2L, 6L	2L, 3L, 6L, 7L
LXAH34	4	101.6	—	—	—	—	2L, 6L	2L, 3L, 6L, 7L
LXAH3418	4-1/8	104.8	—	—	3-1/2	88.9	2L, 6L	2L, 3L, 6L, 7L
LXAH3414	4-1/4	108.0	4	101.6	—	—	2L, 6L	2L, 3L, 6L, 7L
LXAH3412	4-1/2	114.3	—	—	—	—	2L, 6L	2L, 3L, 6L, 7L
LXAH3434	4-3/4	120.7	4-1/2	114.3	4	101.6	2L, 6L	2L, 3L, 6L, 7L
LXAH35	5	127.0	—	—	—	—	2L, 6L	2L, 3L, 6L, 7L
LXAH3512	5-1/2	139.7	—	—	—	—	2L, 6L	2L, 3L, 6L, 7L
LXAH36	6	152.4	—	—	—	—	2L, 6L	2L, 3L, 6L, 7L

Note: We recommend the use of a carbide tipped pilot drill when cutting hard materials. Bits available in standard and long lengths - 3 1/4" (83 mm) LXAH9314CTPB and 4 1/4" (108 mm) LXAH9414CTPB.

PLUMBER'S KIT



LXAH3PSET6 8 PIECE

3/4", 7/8", 1-1/8",
1-1/2", 1-3/4", 2-1/4"
Arbors: 1L, 2L

MEDIUM KIT

ELECTRICIAN'S KIT



LXAH3LSET6 8 PIECE

7/8", 1-1/8", 1-3/8",
1-3/4", 2", 2-1/2"
Arbors: 1L, 2L

MEDIUM KIT

CONTRACTOR'S KIT



LXAH3GSET11 15 PIECE


3/4", 7/8", 1", 1-1/8", 1-1/4",
1-3/8", 1-1/2", 1-3/4", 2",
2-9/16", 3" Arbors: 1L, 2L
Two pilot drills

LARGE KIT

SPEED SLOT® BI-METAL HOLE SAW WITH T3 TECHNOLOGY®



DIAMETER		1 PER BOX	1 PER BLISTER SEAL	1 PACK ARBORED	PIPE TAP		PIPE ENTRANCE		USE ARBOR	
IN	MM	PROD NO	PROD NO	PROD NO	IN	MM	IN	MM	SNAP-BACK™	STANDARD
3-1/8	79.4	3005050L	2079613	1772964	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
3-1/4	82.6	3005252L	2060602	1772966	3	76.2	—	—	2L, 6L	2L, 3L, 6L OR 7L
3-3/8	85.7	3005454L	2079614	1772945	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
3-1/2	88.9	3005656L	2060595	1772946	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
3-5/8	92.1	3005858L	2060597	1772949	—	—	3	76.2	2L, 6L	2L, 3L, 6L OR 7L
3-3/4	95.3	3006060L	2079615	1772950	3-1/2	85.7	—	—	2L, 6L	2L, 3L, 6L OR 7L
3-7/8	98.4	3006262L	2079616	1773001	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
4	101.6	3006464L	2059708	1773002	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
4-1/8	104.8	3006666L	2060593	1773003	—	—	3-1/2	85.7	2L, 6L	2L, 3L, 6L OR 7L
4-1/4	108.0	3006868L	2059710	1773004	4	95.3	—	—	2L, 6L	2L, 3L, 6L OR 7L
4-3/8	111.1	3007070L	2079617	1773005	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
4-1/2	114.3	3007272L	2059709	1773006	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
4-5/8	117.5	3007474L	2079618	—	—	—	4	95.3	2L, 6L	2L, 3L, 6L OR 7L
4-3/4	120.7	3007676L	2079619	1773008	4-1/2	108.0	—	—	2L, 6L	2L, 3L, 6L OR 7L
5	127.0	3008080L	2060591	—	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
5-1/2	139.7	3008888L	2079620	—	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
6	152.4	3009696L	2059707	—	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L

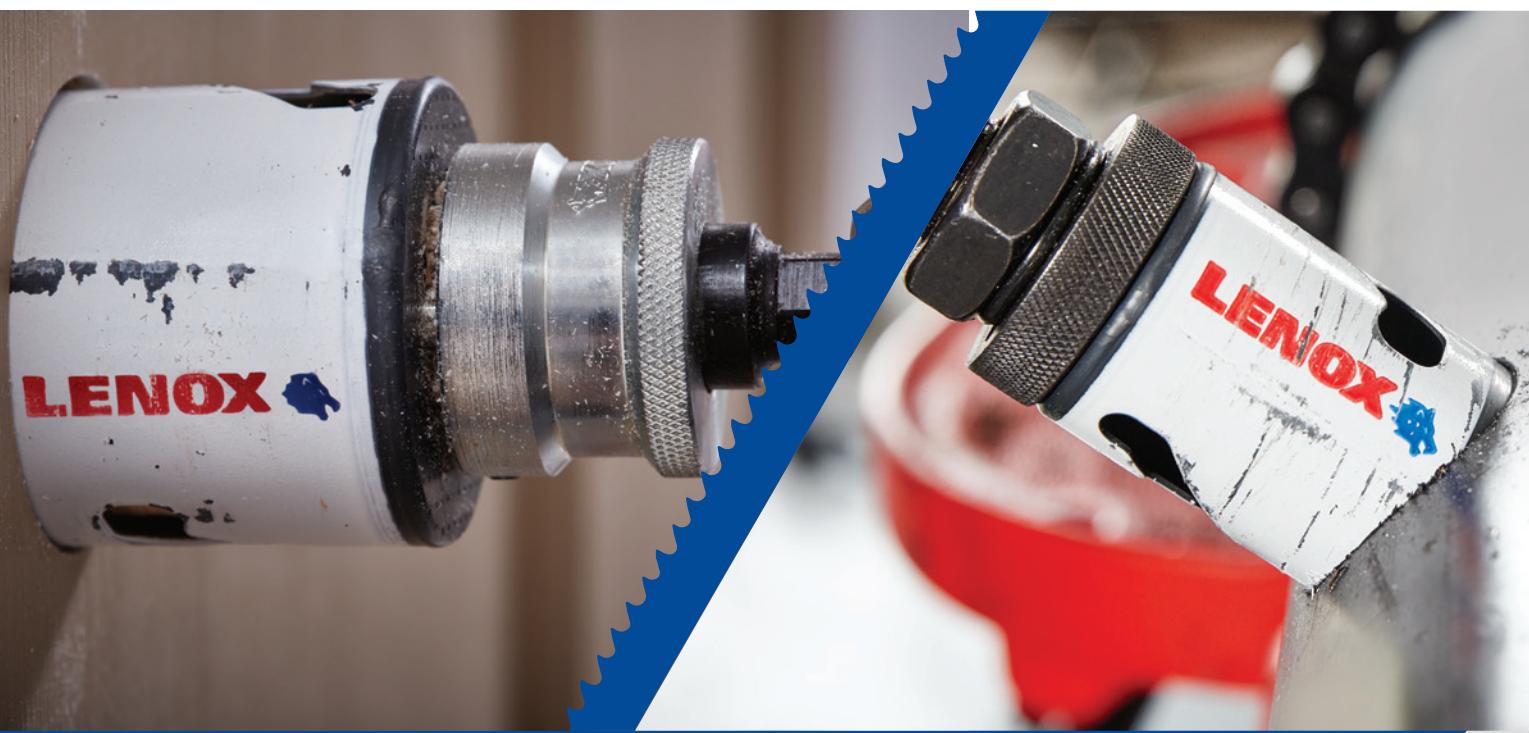



SPEED SLOT® BI-METAL HOLE SAW WITH T3 TECHNOLOGY® KITS

CONVENIENT STORAGE FOR TRADE-SPECIFIC USES

DURABLE

Durable construction for tough workplace environments

SECURE

Latches close case tightly and securely

LONG LASTING

Metal latches and metal pin hinges



ARBORED KIT



34081600AE
6 PIECE KIT
ELECTRICIAN'S KIT

7/8", 1-1/8", 1-3/8",
1-3/4", 2", 2-1/2"

LARGE KIT

CONTRACTOR'S KITS



30370400G
5 PIECE KIT

2", 3", 3-3/8", 4-1/8"
Standard
Arbor: 2L

LARGE KIT



308042000G
26 PIECE KIT-BIG DADDY™

3/4", 7/8", 1", 1-1/8", 1-3/8", 1-1/2", 1-3/4",
2", 2-1/8", 2-1/4", 2-1/2", 2-11/16", 3", 3-1/4",
3-3/8", 3-5/8", 3-3/4", 4-1/8", 4-1/2", 4-3/4"
Standard Arbors: 1L, 2L, 5L

Three pilot drills

LARGE KIT



30374500G
9 PIECE KIT

2-1/8", 2-9/16",
3-1/4",
3-3/4", 4-3/4"
Standard
Arbor: 2L

Three pilot drills

LARGE KIT



308201200G
17 PIECE KIT

5/8", 3/4", 7/8", 1", 1-1/8",
1-1/4", 1-3/8", 1-1/2",
1-3/4", 2", 2-1/2", 3"
Standard Arbors: 1L, 2L

Three pilot drills

LARGE KIT



30807700G
9 PIECE KIT

7/8", 1", 1-1/4", 1-3/8", 1-1/2", 1-3/4",
2-1/8"
Standard Arbors: 5L, 6L

MEDIUM KIT



1815140
7 PIECE KIT

7/8", 1", 1-1/8",
1-1/2", 2-1/8"
Standard Arbors:
2L, 5L

MINI KIT

ELECTRICIAN'S KITS



30856C600L

9 PIECE KIT

7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2"
Standard Arbors: 2L, 5L

One Arbor adaptor

MEDIUM KIT



30800600L

10 PIECE KIT

7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2"
Standard Arbors: 2L, 5L

One pilot drill
One Arbor adaptor

LARGE KIT



308021200L

17 PIECE KIT

3/4", 7/8", 1-1/8", 1-3/8", 1-3/4", 2",
2-1/2", 2-11/16", 3", 3-5/8", 4-1/8", 4-3/4"
Standard Arbors: 2L, 5L

Three pilot drills

LARGE KIT



1815139

8 PIECE KIT

7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2"
Standard Arbors: 2L, 5L

MINI KIT



REFRIGERATION KIT



30830600R

8 PIECE KIT

5/8", 7/8", 1-1/8"
1-3/8", 1-5/8", 2-1/8"
Standard Arbors: 5L, 6L

MEDIUM KIT

PLUMBER'S KITS



30860C600P

9 PIECE KIT

3/4", 7/8", 1-1/8", 1-3/8", 2", 2-1/2"
Standard Arbors: 2L, 5L

One Arbor adaptor

MEDIUM KIT



30808600P

10 PIECE KIT

3/4", 7/8", 1-1/8", 1-1/2", 1-3/4", 2-1/4"
Standard Arbors: 2L, 5L

One pilot drill
One Arbor adaptor

LARGE KIT



1853786

10 PIECE KIT

2-1/8", 2-1/4", 2-9/16", 2-3/4", 3-5/8", 4",
4-5/8"
Standard Arbor: 2L

Two pilot drills

LARGE KIT



308011200P

17 PIECE KIT

3/4", 7/8", 1-1/8", 1-1/2", 1-3/4", 2-1/4",
2-9/16", 3", 3-1/2", 4", 4-1/4", 4-1/2"
Standard Arbors: 2L, 5L

Three pilot drills

LARGE KIT



1815195

7 PIECE KIT

1-1/4", 1-3/8", 1-1/2", 2", 2-1/2"
Standard Arbors: 2L, 5L

MINI KIT

AUTOMOTIVE KIT



30805500A

7 PIECE KIT

3/4", 7/8", 1",
1-1/8", 1-1/4"
Standard Arbor: 5L

One Arbor adaptor

COMPACT KIT



LENOX SNAP-BACK™ QUICK CHANGE HOLE SAW ARBORS

TOOL-FREE BIT CHANGE

No allen key required to change LENOX pilot bit*

ANTI-JAM COLLAR

Reinforced collar drives hole saw without jamming or disengaging

UNIVERSAL HOLE SAW COMPATIBILITY

Accepts all threaded hole saws, no adapters required**

SINGLE-HANDED OPERATION

Collar snaps back and stays in position while changing bits



SNAP BACK™



STEP 1
Unlock Hole Saw



STEP 2
Unlock Pilot Bit

*Only applies to LENOX Pilot Drills

**For the Range of Diameters Listed On Packaging

PROD NO	DESCRIPTION	COMPATIBLE HOLE SAW SIZES		SHANK SIZE	
		IN	MM	IN	MM
LXA9912PBM	2L QC WITH HIGH SPEED STEEL PILOT DRILL	1-1/4" - 6"	31.8 - 152.4	1/2"	12.7
LXA9938PBM	5L QC WITH HIGH SPEED STEEL PILOT DRILL	9/16" - 1 3/16"	14.3 - 30.2	3/8"	9.5
LXA9912CPBM	2L QC WITH CARBIDE & SELF-FEED PILOT DRILL	1-1/4" - 6-1/4"	31.8 - 158.8	1/2"	12.7

SNAP-BACK™ QUICK CHANGE EXTENSIONS

DURABILITY AND EXTENDED LIFE

Carbon steel collar and shaft for durability and extended life

ONE-HANDED RELEASE

SNAP-BACK™ Quick Change mechanism for quick and easy release

BIT HELD SECURELY IN PLACE

Holds bits securely on ball detent bits (Quick Change)

1/4" extension works with 1/4" arbors and insert bits.

It is magnetic for additional holding power

**SNAP
BACK™**



Quick Change Shank

PROD NO	CHUCK SIZE		FITS ARBOR			
	IN	MM	IN	MM	SNAP-BACK™	STANDARD
1852050	5-1/2	140	7/16	11	2L	1L, 2L, 3L
1852047	12	305	3/8	9.5	5L, 6L	5L, 6L, 7L
1852048	12	305	7/16	11	2L	1L, 2L, 3L
1852049	18	457	7/16	11	2L	1L, 2L, 3L



1852050 1852047 1852048 1852049

STANDARD ARBORS & ACCESSORIES

ARBORS & ACCESSORIES FOR YOUR DRILLING NEEDS

DURABILITY

Hardened carbon steel for strength

STARTS ON CONTACT

Split point pilot drill designed for fast penetration and to reduce walking



LENOX 6L Standard Arbor with quick change feature (1779805)

PROD NO	DESC	SAWS	SIZES		TYPE	SHANK SIZE		PRIMARY FEATURE
			IN	MM		IN	MM	
1779774	1L	9L-19L	9/16-1-3/16	14.3-30.2	HOLLOW HEX	1/2 & LARGER	12.7 & LARGER	Adjustable pilot bit
1779801	2L	20L-96L	1-1/4-6	31.8-152.4	SOLID HEX	1/2 & LARGER	12.7 & LARGER	Use for enlarging holes
1779802	3L	20L-96L	1-1/4-6	31.8-152.4	SOLID HEX	1/2 & LARGER	12.7 & LARGER	Solid shank
1779803	4L	9L-19L	9/16-1-3/16	14.3-30.2	3 SIDED	1/4 & LARGER	6.4 & LARGER	Adjustable pilot bit, 3 flats on shank
1779804	5L	9L-19L	9/16-1-3/16	14.3-30.2	HEX	3/8 & LARGER	9.5 & LARGER	Use for 9A-19A arbored hole saws
1779805	6L	20L-96L	1-1/4-6	31.8-152.4	HEX	3/8 & LARGER	9.5 & LARGER	Quick change arbor
1779806	7L	24L-96L	1-1/2-6	31.8-152.4	HEX	3/8 & LARGER	9.5 & LARGER	Plug ejection feature

PROD NO	DESCRIPTION	CHUCK SIZE		FITS ARBOR	
		IN	MM	SNAP-BACK™	SOLID HEX
30857AA1	Standard Arbor Adaptor (1 pack)	—	—	5L	1L, 4L, 5L
3084818X	18" Extension (1 pack)	1/2 & LARGER	12.7 & LARGER	2L	1L, 2L, 3L
3084712X	12" Extension (1 pack)	1/2 & LARGER	12.7 & LARGER	2L	1L, 2L, 3L
3084310X*	10" Extension (1 pack)	3/8 & LARGER	9.5 & LARGER	5L, 6L	5L, 6L, 7L
3084655X	5-1/2" Extension (1 pack)	1/2 & LARGER	12.7 & LARGER	2L	1L, 2L, 3L
3087935PD	1/4" Split point stubby pilot bit	—	—	—	—

* Fits arbored hole saws

LENOX HOLE SAW PILOT DRILLS

QUICK CHANGE

For Tool-Free use In LENOX Snap-Back™ Arbors

UNIVERSAL COMPATIBILITY

Fits both quick change and traditional non-quick change arbors†



PROD NO	DESCRIPTION	LENGTH		DIAMETER		COMPATIBLE		PACK SIZE	APP ICON
		IN	MM	IN	MM	SNAP-BACK™ ARBORS	TRADITIONAL ARBORS		
LXAH99314PB	3-1/4" (83MM) PILOT DRILL 1 PK	3-1/4"	82.6	1/4"	6.4			1	
LXAH99314PB25	3-1/4" (83MM) PILOT DRILL 25 PK	3-1/4"	82.6	1/4"	6.4			25	
LXAH99414PB	4-1/4" (108MM) PILOT DRILL 1 PK	4-1/4"	108.0	1/4"	6.4			1	
LXAH99414PB25	4-1/4" (108MM) PILOT DRILL 25 PK	4-1/4"	108.0	1/4"	6.4			25	
LXAH99314CTPB	3-1/4" (83MM) CARBIDE PILOT DRILL 1 PK	3-1/4"	82.6	1/4"	6.4	2L QC, 5L QC	1L, 2L, 3L, 4L, 5L, 6L	1	
LXAH9334MMPB	3-3/4" (95MM) CARBIDE PILOT DRILL 1PK	3-3/4"	95.3	1/4"	6.4			1	
LXAH99414CTPB	4-1/4" (108MM) CARBIDE PILOT DRILL 1PK	4-1/4"	108.0	1/4"	6.4			1	
LXAH9334SPB	3-3/4" (95MM) SELF-FEED PILOT DRILL 1PK	3-3/4"	95.3	3/8"	9.5			1	

†Excluding proprietary arbor systems not using standard 1/4" shank pilot drills



LENOX® DIAMOND™* HOLE SAWS

MORE HOLES. LESS TIME.

LONG LASTING

Continuous, brazed edge for long life in tile and stone

DURABLE

Robust design for durability in tough applications

FAST, EASY CUTTING

Low torque, little pressure required

EASY PLUG REMOVAL

Over-sized slot in hole saw for easy plug removal

Use standard Arbor, SNAP-BACK™ Arbor for best results use the LENOX Arbor with Retractable Pilot Drill



ONE PIECE HOLE SAWS

1 PER PACK		PIPE TAP		PIPE ENTRANCE		RPM		
PROD NO	IN	MM	IN	MM	IN	MM	IN	MM
121063DGDS	3/16	5	—	—	—	—	1500	2000
121074DGDS	1/4	6	—	—	—	—	2000	2500
121085DGDS	5/16	8	—	—	—	—	2000	2500
121096DGDS	3/8	10	—	—	—	—	2000	2500
121108DGDS	1/2	13	—	—	—	—	2000	2500
121110DGDS	5/8	16	—	—	—	—	1500	2000
121121DGDS	3/4	19	3/4	13	3/8	10	1500	2000
1211416DGDS	1	25	—	—	—	—	—	—
1211622DGDS	1-3/8	35	—	—	1	25	—	—
12158DGDS4A	4 PC KIT SIZES: 3/16", 1/4", 5/16", 3/8"							



STANDARD HOLE SAWS

1 PER PACK		PIPE TAP		PIPE ENTRANCE		USE ARBOR		RPM			
PROD NO	IN	MM	IN	MM	IN	MM	RETRACTABLE	SNAP-BACK™	STANDARD	IN	MM
1211314DGHS	7/8	22	3/4	19	1/2	13	—	5L	1L, 4L, 5L	800	1200
1225618DGHS	1-1/8	29	1	25	3/4	19	—	5L	1L, 4L, 5L	500	900
1211520DGHS	1-1/4	32	—	—	—	—	5L 5/8-18	2L, 6L	2L, 3L, 6L	500	900
1211722DGHS	1-3/8	35	—	—	1	25	5L 5/8-18	2L, 6L	2L, 3L OR 6L	500	900
1211824DGHS	1-1/2	38	1-1/4	32	—	—	5L 5/8-18	2L, 6L	2L, 3L, 6L, 7L	500	900
1211932DGHS	2	51	—	—	1-1/2	38	5L 5/8-18	2L, 6L	2L, 3L, 6L, 7L	400	800
1212040DGHS	2-1/2	64	—	—	2	51	5L 5/8-18	2L, 6L	2L, 3L, 6L, 7L	200	600

Suggested RPMs only: Porcelain, Ceramic, Slate, Granite, Marble, Glass, Fiberglass, Travertine, Cement Board, Laminates

*This hole saw uses manufactured diamonds engineered for cutting

DIAMOND™* KIT

ARBOR WITH RETRACTABLE PILOT DRILL

CENTERING PIN DESIGNED TO REDUCE WALKING

CARBIDE TIPPED FOR LONG LIFE



1853785

10 PIECE KIT

1/4", 3/4", 7/8", 1-1/8", 1-3/8", 2", 2-1/2"
Arbors: 2L, 5L. Hex Wrench

LARGE KIT

PROD NO	DESC	FITS DIAMOND HOLE SAWS	SIZES		SHANK TYPE	SHANK SIZE	
			IN	MM		IN	MM
1970538	5L 5/8-18	Standard	1-1/4-2-1/2	32-64	SOLID HEX	3/8 & LARGER	9.5 & LARGER

PROD NO	DESCRIPTION	CHUCK SIZE		FITS ARBOR
		IN	MM	
1970540	Retractable Pilot Drill	1/4	6.4	5L 5/8-18

CARBIDE GRIT HOLE SAWS

DESIGNED FOR CUTTING ABRASIVE MATERIALS

CUTS ABRASIVE MATERIALS

Tungsten carbide grit cuts through fiberglass, ceramic tile, laminates and other abrasive materials

CLEAN CUTTING

Carbide grit edge designed not to snag or chip when cutting thin materials

USE STANDARD ARBOR OR SNAP-BACK™ ARBOR



1 PER BOX	DIAMETER		PIPE TAP		PIPE ENTRANCE		USE ARBOR		RECOMMENDED RPM ONLY		
PROD NO	IN	MM	IN	MM	IN	MM	SNAP-BACK™	STANDARD	BRICK, DRYWALL, PORCELAIN, MARBLE, CERAMIC TILE	SLATE, FIBERGLASS, PARTICLE BOARD, LAMINATES, GRANITE, CEMENT	CAST IRON
2994848CG	3	76.2	—	—	2-1/2	63.5	2L, 6L	2L, 3L, 6L, 7L	200	300	100
2995252CG	3-1/4	82.6	3	76.2	—	—	2L, 6L	2L, 3L, 6L, 7L	200	300	100
2995858CG	3-5/8	92.1	—	—	3	76.2	2L, 6L	2L, 3L, 6L, 7L	100	200	100
2996464CG	4	101.6	—	—	—	—	2L, 6L	2L, 3L, 6L, 7L	100	200	100
2996666CG	4-1/8	104.8	—	—	3-1/2	88.9	2L, 6L	2L, 3L, 6L, 7L	100	200	100

CARBIDE GRIT RECESSED LIGHTING HOLE SAWS

BEST FOR CUTTING ABRASIVE MATERIALS

LONG LIFE

Hard tungsten carbide grit edge for a long life in abrasive materials

FAST, EASY CUTTING

Continuous cutting edge for smooth cutting

LIMITS DUST / DEBRIS

Solid back design collects dust and debris



1 PER BOX	DIAMETER		FOR FIXTURES			USE ARBOR	
PROD NO	IN	MM				SNAP-BACK™	STANDARD
30861438RL	4-3/8	111	Capri, Marco, Halo, Mini-Juno			2L	2L, 7L
12100538RL	5-3/8	137	Capri, Marco, Halo, Mini-Juno, Lightolier®			2L	2L, 7L
30862638RL	6-3/8	162	Capri, Halo, Pathway & Thomas			2L	2L, 7L
30863658RL	6-5/8	168	Juno, Progress & Pathway			2L	2L, 7L
30864678RL	6-7/8	175	Capri, Hubbell®, Lightolier®, Lithonia®, Marco, Prescolite®, & Progress			2L	2L, 7L

Use LXA9414CTPB or 1779771 Pilot Drill

HALO is a registered trademark of Halo Lighting, JUNO is a registered trademark of Juno Lighting Inc., LITHONIA is a registered trademark of Lithonia, Inc., LIGHTOLIER is a registered trademark of Lightolier, Inc., and PRESCOLITE is a registered trademark of Prescolite, Inc.



CARBIDE HOLE CUTTERS

DESIGNED SPECIFICALLY FOR SHEET METAL HOLE CUTTING

ACCURATE, BURR-FREE HOLES

Precision ground carbide teeth for fast cutting of clean, round holes


WILL NOT DAMAGE WORK

Over-drill stopper prevents the tool from penetrating beyond the hole

STARTS ON CONTACT

Split point pilot bit designed for fast penetration and to reduce walking

1 PER BOX	DIAMETER		CONDUIT	USE ARBOR	
PROD NO	IN	MM	SIZE	SNAP-BACK®	STANDARD
2009212CHC	3/4	19.1	3/8"	5L	1L, 4L, 5L
2009314CHC	7/8	22.2	1/2"	5L	1L, 4L, 5L
2009416CHC	1	25.4	—	5L	1L, 4L, 5L
2009618CHC	1-1/8	28.6	3/4"	5L	1L, 4L, 5L
20097195CHC	1-7/32	30.9	—	5L	1L, 4L, 5L
2009820CHC	1-1/4	31.8	—	2L, 6L	2L, 3L, 6L
2010022CHC	1-3/8	34.9	1"	2L, 6L	2L, 3L, 6L
2010224CHC	1-1/2	38.1	—	2L, 6L	2L, 3L, 6L
2010328CHC	1-3/4	44.5	1-1/4"	2L, 6L	2L, 3L, 6L
2010432CHC	2	50.8	1-1/2"	2L, 6L	2L, 3L, 6L
2010534CHC	2-1/8	54.0	—	2L, 6L	2L, 3L, 6L
2010840CHC	2-1/2	63.5	2"	2L, 6L	2L, 3L, 6L
2010942CHC	2-5/8	66.7	—	2L, 6L	2L, 3L, 6L
2011344CHC	2-3/4	69.9	—	2L, 6L	2L, 3L, 6L
2011448CHC	3	76.2	2-1/2"	2L, 6L	2L, 3L, 6L
3087935PD	1/4" Split Point Stubby Pilot Bit		—	2L, 3L, 6L	

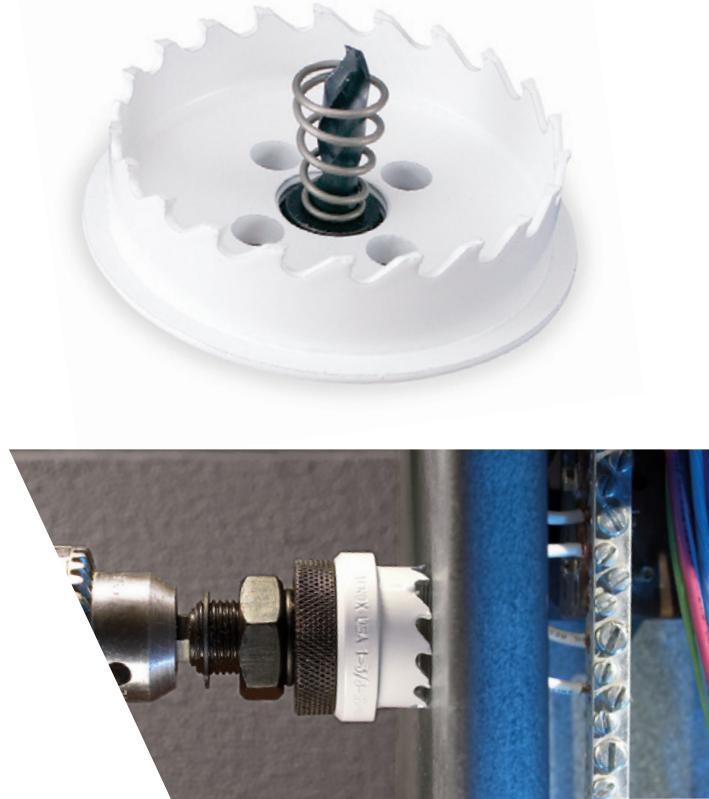

ELECTRICIAN'S KITS

30877300CHC

12 PIECE KIT

7/8", 1-1/8", 1-3/8" Arbors: 3L, 5L
1/4" split point pilot bit. Plug ejection springs, 1/8" hex wrench

COMPACT KIT



30878500CHC

15 PIECE KIT

7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2"
Arbors: 3L, 5L. 1/4" split point pilot bit
Plug ejection springs, 1/8" hex wrench

MEDIUM KIT



LENOX PROTOOL LUBE® CUTTING TOOL LUBRICANT

EXTENDS TOOL LIFE

SHORTENS CUTTING TIME BY UP TO 50%

Provides smoother, cleaner cutting and dramatically longer tool life

REDUCES HEAT AND FRICTION

Water soluble, so it cleans up with water

Biodegradable and non-toxic



PROD NO	CONTAINER SIZE			CONTAINERS PER CASE	NFPA CODE Specs			
	GALLON	LITER	CONTAINERS PER CASE		HMIS/WHMIS	HEALTH	FIRE	REACTIVITY
68040LNX	6 OZ	.17	12		HEALTH INDEX -1 FLAMMABILITY -0 REACTIVITY -0 PERSONAL PROTECTION -A	1	0	0
68047	1	3.8	4		SPECIAL HAZARD	0	0	0

Use this product as it comes from the container—do not mix with water. MSDS available in hard copy or downloadable from lenoxtools.com

HOLE SAW SELECTION GUIDE

	WOOD	NAIL-EMBEDDED WOOD	PLASTICS & COMPOSITES	NON-FERROUS METAL	METAL	STAINLESS STEEL	CAST IRON	DRYWALL / PLASTER	CEMENT BOARD	BRICK & BLOCK	TILE & GRANITE
BEST	MULTI-MATERIAL		CARBIDE GRIT	CARBIDE TIPPED					MULTI-MATERIAL		LENOX® DIAMOND™
BETTER	CARBIDE TIPPED		BI-METAL					DIAMOND GRIT	CARBIDE TIPPED		CARBIDE GRIT
GOOD	BI-METAL		—					CARBIDE GRIT	DIAMOND GRIT		CARBIDE TIPPED

*This hole saw uses manufactured diamonds engineered for cutting

RECOMMENDED HOLE SAW RPM CARBIDE-TIPPED

DIAMETER		RECOMMENDED RPM				
IN	MM	ALUM	STAINLESS STEEL	FIBER-GLASS	CERAMIC TILE	CAST IRON
11/16	17.5	1800	690	270	550	240
3/4	19.1	1700	640	250	500	210
7/8	22.2	1500	550	210	430	180
1	25.4	1300	480	190	370	150
1-1/8	28.6	1100	420	170	330	140
1-1/4	31.8	1000	380	160	300	130
1-3/8	34.9	900	350	140	270	110
1-1/2	38.1	900	320	120	250	100
1-5/8	41.3	700	290	110	230	90
1-3/4	44.5	700	270	110	210	90
2	50.8	600	240	90	190	80
2-1/8	54.0	600	220	90	180	70
2-1/4	57.2	600	210	80	170	70
2-3/8	60.3	600	200	80	160	70
2-1/2	63.5	500	190	70	150	60
2-9/16	65.1	500	190	70	140	60

DIAMETER		RECOMMENDED RPM				
IN	MM	ALUM	STAINLESS STEEL	FIBER-GLASS	CERAMIC TILE	CAST IRON
2-5/8	66.7	500	180	70	130	60
2-11/16	68.3	500	180	60	120	60
3	76.2	400	160	60	120	50
3-1/4	82.6	400	150	60	110	50
3-3/8	85.7	400	140	60	110	50
3-1/2	88.9	400	140	50	110	50
3-5/8	92.1	400	130	50	100	40
3-3/4	95.3	300	130	50	110	40
4	101.6	300	120	50	100	40
4-1/8	104.8	300	120	50	90	40
4-1/4	108.0	300	110	50	90	40
4-1/2	114.3	300	110	40	80	30
4-3/4	120.7	300	100	40	80	30
5	127.0	200	100	40	80	30
5-1/2	139.7	200	100	40	70	30
6	152.4	100	80	30	60	30

BI-METAL

DIAMETER		RECOMMENDED RPM				
IN	MM	MILD STEEL	TOOL / STAINLESS STEEL	CAST IRON	BRASS	ALUM
9/16	14.3	580	300	400	790	900
5/8	15.9	550	275	365	730	825
11/16	17.5	500	250	330	665	750
3/4	19.1	460	230	300	600	690
25/32	19.8	425	210	280	560	630
13/16	20.6	425	210	280	560	630
7/8	22.2	390	195	260	520	585
15/16	23.8	370	185	245	495	555
1	25.4	350	175	235	470	525
1-1/16	27.0	325	160	215	435	480
1-1/8	28.6	300	150	200	400	450
1-3/16	30.2	285	145	190	380	425
1-1/4	31.8	275	140	180	360	410
1-5/16	33.3	260	135	175	345	390
1-3/8	34.9	250	125	165	330	375
1-7/16	36.5	240	120	160	315	360
1-1/2	38.1	230	115	150	300	345
1-9/16	39.7	220	110	145	290	330
1-5/8	41.3	210	105	140	280	315
1-11/16	42.9	205	100	135	270	305
1-3/4	44.5	195	95	130	250	295
1-13/16	46.0	190	95	125	250	285
1-7/8	47.6	180	90	120	240	270
2	50.8	170	85	115	230	255
2-1/16	52.4	165	80	110	220	245
2-1/8	54.0	160	80	105	210	240

DIAMETER		RECOMMENDED RPM				
IN	MM	MILD STEEL	TOOL / STAINLESS STEEL	CAST IRON	BRASS	ALUM
2-1/4	57.2	150	75	100	200	225
2-3/8	60.3	140	70	95	190	220
2-1/2	63.5	135	65	90	180	205
2-9/16	65.1	130	65	85	175	200
2-5/8	66.7	130	65	85	170	195
2-11/16	68.3	125	60	80	160	185
2-3/4	69.9	125	60	80	160	185
2-7/8	73.0	120	60	80	160	180
3	76.2	115	55	75	150	170
3-1/8	79.4	110	55	70	140	165
3-1/4	82.6	105	50	70	140	155
3-3/8	85.7	100	50	65	130	150
3-1/2	88.9	95	45	65	130	145
3-5/8	92.1	95	45	60	120	140
3-3/4	95.3	90	45	60	120	135
3-7/8	98.4	85	40	55	110	130
4	101.6	85	40	55	110	130
4-1/8	104.8	80	40	55	110	120
4-1/4	108.0	80	40	55	110	120
4-3/8	111.1	75	35	50	100	105
4-1/2	114.3	75	35	50	100	105
4-5/8	117.5	75	35	50	100	105
4-3/4	120.7	70	35	45	90	95
5	127.0	70	35	45	90	95
5-1/2	139.7	65	30	40	85	90
6	152.4	65	30	40	85	90



LENOX VARI-BIT® STEP DRILL BITS

2X LONGER LIFE*, 50% FASTER STARTS**

STARTS ON CONTACT WITH NO WALKING

PowerDrive™ tip is precision ground, starts on contact with no walking

NO SLIP SHANK READY FOR IMPACT

Optimized for use on standard or impact drills

PRECISE, BURR-FREE HOLES

Dual-flute cutting edges deliver clean, round holes

ALWAYS KNOW WHEN TO STOP

Easy-to-read hole sizes are laser engraved to last the life of the bit

EASILY DRILL A WIDE RANGE OF MATERIALS

Ideal for drilling steel, sheet metal, ducts, stainless, aluminum, copper, brass, plastics and abrasives



POWER DRIVE
2X LONGER LIFE
50% FASTER STARTS



APPLICATION



ITEM #	HOLE SIZES			# OF HOLES	SHANK SIZE		SHANK TYPE	2X LONGER LIFE*	50% FASTER STARTS**
	INCH	MM	INCH		MM	INCH			
30881VB1	1/8, 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 13/32, 7/16, 15/32, 1/2	3.2, 4.0, 4.8, 5.6, 6.4, 7.1, 7.9, 8.7, 9.5, 10.3, 11.1, 11.9, 12.7	13	1/4	6.4	Quick Change	†	†	†
30882VB2	1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1	12.7, 14.3, 15.9, 17.5, 19.1, 20.6, 22.2, 23.8, 25.4	9	3/8	9.5	3 Flat Sides	†	†	†
30883VB3	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4	6.4, 7.9, 9.5, 11.1, 12.7, 14.3, 15.9, 17.5, 19.1	9	1/4	6.4	Quick Change	†	†	†
30884VB4	3/16, 1/4, 5/16, 3/8, 7/16, 1/2	4.8, 6.4, 7.9, 9.5, 11.1, 12.7	6	1/4	6.4	Quick Change	†	†	†
30887VB7	7/8	22.2	1	1/4	6.4	Quick Change	†	†	†
30908VB8	3/16, 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8	4.8, 6.4, 7.9, 9.5, 11.1, 12.7, 14.3, 15.9, 17.5, 19.1, 20.6, 22.22	12	1/4	6.4	Quick Change	†	†	†
30909VB9	7/8, 1-1/8, 1-7/32	22.2, 28.6, 31.0	3	3/8	9.5	3 Flat Sides	†		
30888VB11	7/8, 1-1/8	22.2, 28.6	2	3/8	9.5	3 Flat Sides	†		
30912VB12	7/8, 1-1/8, 1-7/32, 1-1/4, 1-3/8	22.2, 28.6, 31.0, 31.8, 34.9	5	3/8	9.5	3 Flat Sides	†		

ITEM #	DESCRIPTION	EXTENSION LENGTH		EXTENSION SHANK TYPE		COMPATIBLE BITS
		INCH	MM	INCH	MM	
30925VBX8	VARI-BIT® Extension	8	203	3/8	9.50	3 FLAT SIDES

ITEM #	DESCRIPTION	BITS INCLUDED
30929VB30929	4 Piece Step Drill Bit Set	VB1, VB3, VB8, VB12
30889889	3 Piece Step Drill Bit Set	VB1, VB2, VB3
LXA30930	3 Piece Step Drill Bit Set	VB1, VB8, VB11

2X Longer Life*
VS. LENOX prior generation in 1/16" 1008 steel
50% Faster Starts**
VS. LENOX prior generation VB1 through VB8 in 1/16" steel



BI-METAL SHIP AUGER BITS

TOUGHER THAN NAILS

EXTREME DURABILITY

High speed steel cutting edge for superior durability in nail-embedded wood

LONG LIFE

High speed steel screw tip designed to provide wear resistance and long life

FAST, EASY DRILLING

Unique parabolic screw tip pulls the bit through material quickly and effortlessly

RESHARPPENABLE

Resharpen with LENOX Diamond File
(prod no. 25312DIAF1)



High Speed Steel Cutting Edge

Parabolic Tip



LONG-LASTING
Bi-Metal
BLADE TECHNOLOGY

Our Bi-Metal technology fuses two premium steels together.

PROD NO	HOLE DIAMETER		OVERALL LENGTH		TWIST LENGTH	
	IN	MM	IN	MM	IN	MM
1455707A1216	3/4	19	7-1/2	191	4	102
1455907A1416	7/8	22	7-1/2	191	4	102
1456107A1616	1	25	7-1/2	191	4	102
1456307A1816	1-1/8	29	7-1/2	191	4	102
1456407A2016	1-1/4	32	7-1/2	191	4	102

All sizes 7/16" shank

PROD NO	HOLE DIAMETER		OVERALL LENGTH		TWIST LENGTH	
	IN	MM	IN	MM	IN	MM
145400080716*	7/16	11	18	457	12	305
145410080816*	1/2	13	18	457	12	305
145420080916	9/16	14	18	457	12	305
145430081016	5/8	16	18	457	12	305
145440081116	11/16	18	18	457	12	305
145450081216	3/4	19	18	457	12	305
145460081316	13/16	21	18	457	12	305
145470081416	7/8	22	18	457	12	305
145480081516	15/16	24	18	457	12	305
145490081616	1	25	18	457	12	305
145510081816	1-1/8	29	18	457	12	305
145520082016	1-1/4	32	18	457	12	305
145530082216	1-3/8	35	18	457	12	305
145540082416	1-1/2	38	18	457	12	305

*3/8" Shank. All others 7/16" shank

AUGER BIT ACCESSORIES

PROD NO	EXTENSION LENGTH		DESCRIPTION	SHANK SIZE	
	IN	MM		IN	MM
3084310X	10"	254	Extension	3/8"	9.52
3084655X	5-1/2"	139.7	Extension	7/16"	11.11
3084712X	12"	304.8	Extension	7/16"	11.11
3084818X	18"	28.575	Extension	7/16"	11.11
1852047	12"	304.8	Quick Change Extension	3/8"	9.52
1852050	5-1/2"	139.7	Quick Change Extension	7/16"	11.11
1852048	12"	304.8	Quick Change Extension	7/16"	11.11
1852049	18"	457.2	Quick Change Extension	7/16"	11.11
25312DIAF1	—	—	Diamond File	—	—



1787507

15 PIECE, SELF-FEED BIT/AUGER KIT

Augers: 7/8", 1-1/8", 1-1/4" Length: 7-1/2"
Self-feed bits: 1-1/2", 1-3/4", 2-1/8", 2-9/16"
Extension: 5-1/2" Five lead screws
Hex Wrench Set

LARGE KIT



BI-METAL UTILITY BITS

TOUGHER THAN NAILS

EXTREME DURABILITY

High speed steel cutting edges provide long life in tough applications, including nail-embedded wood

OPTIMIZED FOR CORDLESS DRILLING

Smooth, effortless drilling extends battery life

FAST CLEAN CUTTING

Three cutting edges enhance chip removal for a fast, clean hole

FAST, EASY DRILLING

Aggressive lead screw tip pulls the bit through material quickly and effortlessly



RESHARPNABLE
Resharpen with LENOX
Diamond File (25312DIAF1).

Our Bi-Metal technology fuses
two premium steels together.

PROD NO	EXTENSION LENGTH	OVERALL LENGTH	IN	MM	IN	MM
1094706A1016	5/8*	16	6	152		
1094806A1216	3/4	19	6	152		
1094906A1416	7/8	22	6	152		
1095006A1616	1	25	6	152		
1095106A1816	1-1/8	29	6	152		
1095206A2016	1-1/4	32	6	152		
1095306A2216	1-3/8	35	6	152		

*1/4" shank—all others 3/8" shank



10954300S
3 PIECE SET

3/4", 7/8", 1"



14787300PS
3 PIECE
PLUMBER'S SET

7/8", 1-1/8", 1-3/8"



10955500K
5 PIECE KIT

3/4", 7/8", 1", 1-1/8", 1-1/4"

COMPACT KIT



14788500PK
5 PIECE
PLUMBER'S KIT

3/4", 7/8", 1", 1-1/8", 1-3/8"

COMPACT KIT

UTILITY BIT ACCESSORIES

PROD NO	EXTENSION LENGTH	IN	MM	DESCRIPTION
3084310X	10"	254		Extension
1852047	12"	305		Quick Exchange Extension
25312DIAF1				Diamond File



BI-METAL SELF-FEED BITS

TOUGHER THAN NAILS

EXTREME DURABILITY

High speed steel cutting edge for superior durability in nail-embedded wood

Stays sharper longer

CLEAN HOLES AND EASY REMOVAL

Chamfered edge allows bit to be removed easily after drilling

Flutes remove excess wood chips

FAST, EASY DRILLING

Aggressive lead screw tip pulls the bit through material quickly and effortlessly

INCREASED VALUE

Extra lead screw and wrench included in every package

DEEP CUTS

Long shank that cuts 4"x 4" without extension

QUICK CHANGE

Impact hex shank allows for quick changing of the bits



RESHARPNABLE
Resharpen with LENOX
Diamond File (25312DIAF1).



Our Bi-Metal technology fuses two premium steels together.



Chamfered Edge
& Flutes



Lead Tip
Screw



High Speed Steel

PROD NO	EXTENSION LENGTH		ENTRANCE FOR PIPE RIGID CONDUIT		ENTRANCE FOR TUBING	
	IN	MM	IN	MM	IN	MM
1787511	1"	25	1/2"	12.7	7/8"	22.2
1787512	1-1/8"	29	1/2"	12.7	1"	25.4
1787513	1-1/4"	32	3/4"	19	1-1/8"	28.6
1787515	1-3/8"	35	1"	25.4	1-1/4"	31.8
1787561	1-1/2"	38	—	—	1-3/8"	34.9
1787562	1-3/4"	45	1-1/4"	31.8	1-1/2"	38.1
1787563	2"	51	1-1/2"	38.1	1-7/8"	47.6
1787564	2-1/8"	54	—	—	2"	50.8
1787565	2-1/4"	57	—	—	2-1/8"	54
1787566	2-9/16"	65	2"	50	2-1/2"	63.5
1787502	3"	76	2-1/2"	63	2-7/8"	73
1787503	3-5/8"	92	3"	76.2	3-1/2"	88.9
1787504	4-5/8"	118	4"	101.6	4-1/2"	114.3

ACCESSORIES

PROD NO	DESCRIPTION	FITS		PACK
		IN	MM	
1787602	Self-Feed Lead Screws	1"- 1-3/8"	25.4-34.9	5
1787604	Self-Feed Lead Screws	1-1/2"- 2-9/16"	38.1-65	5
1787605	Self-Feed Set Screws	—	—	5
3084655X*	5-1/2" Extension	—	—	1
3084712X*	12" Extension	—	—	1
3084818X*	18" Extension	—	—	1
1852049**	18"Quick Change Extension	—	—	1
1852050**	5-1/2"Quick Change Extension	—	—	1
1852048**	12"Quick Change Extension	—	—	1
25312DIAF1	Diamond File	—	—	1

*All have 7/16" (11.11 mm) hex shank with 2 set screws to lock Bi-Metal self-feed bit in place.

**All have 7/16 (11.11 mm) hex shanks



1787505
12 PIECE
SELF-FEED KIT

1-3/8", 1-1/2", 2-1/8", 2-9/16"
Extension: 5-1/2" Five lead
screws, Hex Wrench Set

LARGE KIT



1787506
16 PIECE SELF-FEED KIT

1-1/8", 1-1/4", 1-3/8", 1-1/2", 1-3/4",
2-1/8", 2-9/16" Extensions: 5-1/2", 12",
Five lead screws, Hex Wrench Set

LARGE KIT



1787507
15 PIECE SELF-FEED
BIT/AUGER KIT

Augers: 7/8", 1-1/8", 1-1/4", Length: 7-1/2"
Self-feed bits: 1-1/2", 1-3/4", 2-1/8", 2-9/16",
Extension: 5-1/2", Five lead screws,
Hex Wrench Set

LARGE KIT





T2™ TECHNOLOGY HACKSAW BLADES

T2™ TECHNOLOGY

Blade design delivers up to 2X longer blade life versus the prior generation of LENOX hacksaw blades

SHATTER RESISTANT

Bi-Metal construction allows blades to bend and flex without breaking



TPI	LENGTH X WIDTH		1-PACK PROD NO	2-PACK PROD NO	10-PACK PROD NO	100-PACK PROD NO	APPLICATION
	IN	MM					
14	12 X 1/2	300 X 12.7	—	—	20143V214HE	—	Wood and Metal
18	10 X 1/2	254 X 12.7	—	20163T018HE	20140V018HE	—	Heavy Metal
18	12 X 1/2	300 X 12.7	20154S218HE	20160T218HE	20144V218HE	20116218HE	Heavy Metal
24	10 X 1/2	254 X 12.7	20151S024HE	23930T024HE	20141V024HE	20111024HE	Medium Metal
24	12 X 1/2	300 X 12.7	20155S224HE	20161T224HE	20145V224HE	20117224HE	Medium Metal
32	10 X 1/2	254 X 12.7	—	20164T032HE	20142V032HE	—	Thin Metal
32	12 X 1/2	300 X 12.7	20156S232HE	20162T232HE	20146V232HE	20118232HE	Thin Metal

HIGH TENSION HACKSAW

50,000 PSI

HIGH BLADE TENSION

Unique I-Beam construction allows blade to tension up to 50,000 psi, resulting in fast, straight cuts

COMFORTABLE GRIPS

Rubberized handles allow for confident handling even in wet or cold environments

CONVERT TO A JAB SAW

Accepts any LENOX reciprocating saw blade to be used as a jab saw

CONVENIENT BLADE STORAGE

Stores up to 5 extra 12" hacksaw blades in the I-Frame



PROD NO	BLADE SPECIFICATION
12132HT50	12" (305 mm) 24TPI Hacksaw Blade



Tensioning Mechanism

Use as a Jab Saw

Stores up to 5 Blades in I-Frame

Comfortable Grips

LOW PROFILE HACKSAW

40,000 PSI

HIGH TENSION

Allows blade to tension up to 40,000 PSI, resulting in fast, straight cuts


FITS INTO TIGHT SPOTS

Low profile tip easily handles close-quarter cuts

MULTI-PURPOSE

Mount blade at 45 degrees for flush cutting applications

PROD NO	BLADE SPECIFICATION
209205012	12" (305 mm) 24TPI Hacksaw Blade



Flush Cutting

LIGHTWEIGHT HACKSAW

30,000 PSI

HIGH TENSION

Saw will tension up to 30,000 PSI

ERGONOMIC GRIP

Front handle grip helps reduce fatigue in continuous cutting applications

MULTI-PURPOSE

Mount blade at 45 degrees for flush cutting applications

PROD NO	BLADE SPECIFICATION
1213188300	12" (305 mm) 24TPI Hacksaw Blade



Flush Cutting

Comfortable Grips

COMPACT HACKSAW

20,000 PSI

ADJUSTABLE TENSION

Lightweight aluminum beam achieves tension up to 20,000 PSI

DURABLE GRIP

Long lasting metal handle

MULTI-PURPOSE

Mount blade at 45 degrees for flush cutting applications

PROD NO	BLADE SPECIFICATION
1805722	12" (305 mm) 24TPI Hacksaw Blade



Durable Grip



ADJUSTABLE HACKSAW

15,000 PSI

EASILY ADJUST TENSION

Large front tensioning mechanism is easy to hold and adjust up to 15,000 PSI

ERGONOMIC GRIP

Rubberized grip allows for confident handling in any work environment

ADJUSTABLE FRAME

Frame will accept both 10" and 12" Hacksaw Blades



Comfortable Grip

LIGHT DUTY HACKSAW

12,000 PSI

ADJUSTABLE TENSION

Lightweight aluminum beam achieves tension up to 12,000 PSI

ROBUST TENSIONING MECHANISM

Keeps parts in place when changing the blade

ERGONOMIC GRIP

Durable handle enables a confident grip in most work environments

MULTI-PURPOSE

Mount blade at 45 degrees for flush cutting applications

PROD NO	BLADE SPECIFICATION
1884466	12" (305 mm) 24TPI Hacksaw Blade



Comfortable Grip

MINI HACKSAW

FITS INTO TIGHT SPACES

COMFORTABLE GRIP

Ergonomic handle design for comfort

TOOL FREE BLADE CHANGE

Toolless blade change design reduces down time

FITS INTO TIGHT SPOTS

Adjustable blade length for flush cutting applications

ADDED VERSATILITY

Accepts both 10" and 12" hacksaw blades or any length of reciprocating saw blade



PROD NO	BLADE SPECIFICATION
LX2014041	10" (254 mm) 24TPI Hacksaw Blade

PLASTIC PIPE HAND SAW

PVC/ABS

CUTS PLASTIC PIPE EASILY

Cutting teeth cut on the pull stroke and not on the push stroke for safety

COMFORTABLE GRIPS

Rubberized handles allow for confident handling even in cold, hot, wet or dirty environments

FLUSH CUTTING OPTION

Easily mount the blade on the bottom of handle for flush cutting applications



TPI	LENGTH		PROD NO	DESCRIPTION
	IN	MM		
10	12	305	20985HSF12	12" Blade & Handle
10	18	457	20980HSF18	18" Blade & Handle
10	12	304	20982HSB12	12" Replacement Blade
10	18	457	20981HSB18	18" Replacement Blade



Comfortable Handle

One Step Flush Cuttings

FOLDING JAB AND UTILITY SAW

DESIGNED FOR CUTTING MULTIPLE MATERIALS

COMFORTABLE GRIP

Over-molded rubberized grip for a comfortable and secure grip while working

SECURELY HOLDS BLADE

Aluminum locking mechanism helps prevent blade from being removed during use

ACCOMMODATES HACKSAW BLADE

Ideal for flush cutting applications or when a hacksaw is not available



Rotate Blade Out



Loosen Knob to Change Blade

PROD NO	DESCRIPTION	BLADES INCLUDED	APPLICATION
20997TFHS618636	Folding Jab Saw with 2 Blades	635R and 6J6R	Plaster, drywall, wood, plastic and metal cutting
148216J6R	1pk Replacement Blades		

COMPACT HAND HACKSAW

CLOSE QUARTER™ SAW

Cut a Wide Variety in Tight Spaces

RUGGED DESIGN

Heavy duty aluminum handle

FITS IN TIGHT SPOTS

Allows for flush cutting applications



20975975



20908908

PROD NO	DESCRIPTION	TPI	BLADE LENGTH	
			IN	MM
20975975	Compact Hand Saw	24	10	254
20908908	Close Quarter™ Saw	32	6	152
20906906	10pk Replacement Blades	32	6	152



SNIPS

MAXIMUM DURABILITY FOR LONG LIFE

LONG BLADE LIFE

Precision-formed blades for Aviation and Bulldog Snips

Bi-material blades for Offset Snips

ULTIMATE SPRING DURABILITY


Reinforced Chrome Silicon valve-quality wire lasts for a lifetime

COMFORTABLE GRIPS

Over-molded handles won't slip or twist

QUICK IDENTIFICATION

Color coding on both blades and handles plus arrow icons allow for easy tool recognition

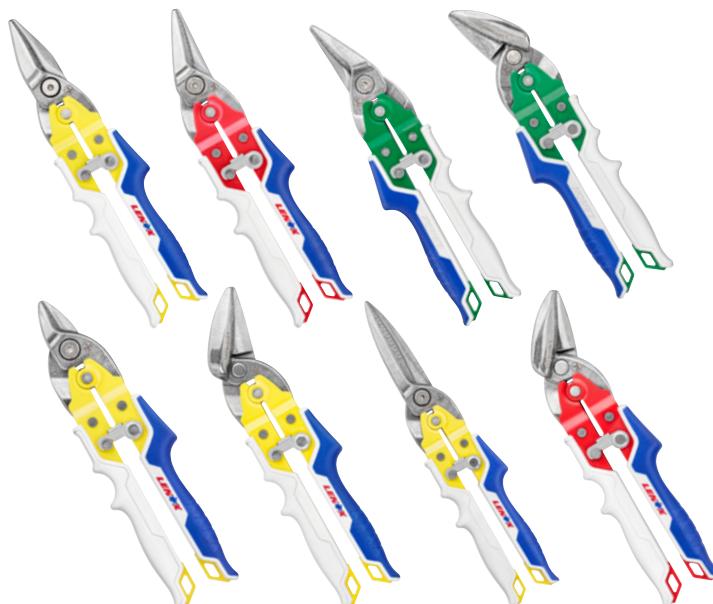

PROD NO	DESCRIPTION	CUTTING CAPACITY		COMPETITIVE CROSS REFERENCE								
		SHEET METAL	STAINLESS STEEL	MALCO®	MIDWEST®	WISS®	KLEIN®	KLENK®	DEWALT®	STANLEY®	MILWAUKEE®	
LXHT14340	STRAIGHT AVIATION SNIPS		18 GA	22 GA	M2003/MAXCG3	P6716-S	M3R	1202S/1102S	MA70020	DWHT14675	FMHT73756	48-22-4530
LXHT14341	LEFT AVIATION SNIPS		18 GA	22 GA	M2001/MAXCG1	P6716-L	M1R	1200L/1100L	MA70000	DWHT14673	FMHT73755	48-22-4510
LXHT14342	RIGHT AVIATION SNIPS		18 GA	22 GA	M2002/MAXCG2	P6716-R	M2R	1201R/1101R	MA70010	DWHT14674	FMHT73557	48-22-4520
LXHT14343	BULLDOG AVIATION SNIPS		16 GA	20 GA	M2005/MAXCG5	P6716-B	M5R	J2103S	MA74500	DWHT14694	FMHT73562	48-22-4500
LXHT14344	LONG STRAIGHT AVIATION SNIPS		18 GA	22 GA	-	-	-	-	-	DWHT14681	FMHT73561	48-22-4537
LXHT14345	OFFSET STRAIGHT AVIATION SNIPS		18 GA	22 GA	-	-	-	-	-	DWHT14680	-	48-22-4532
LXHT14348	OFFSET LEFT AND RIGHT SNIPS SET		18 GA	22 GA	M2006/MAXCG6 M2007/MAXCG7	P6510-L P6510-R	M6R M7R	J2100L/2900L J2101R/2101R	MA75200 MA75210	DWHT14679 DWHT14678	FMHT73559 FMHT73560	48-22-4512 48-22-4522

HVAC TOOLS

PRECISION SHEET METAL FABRICATION TOOLS

ULTIMATE SPRING DURABILITY

Reinforced Chrome Silicone valve-quality wire lasts for a lifetime

COMFORTABLE GRIPS

Over-molded handles won't slip or twist



PROD NO	DESCRIPTION	CUTTING CAPACITY		COMPETITIVE CROSS REFERENCE					
		SHEET METAL	STAINLESS STEEL	MALCO®	MIDWEST®	WISS®	KLEIN®	KLENK®	
22209C5	5 BLADE CRIMPER		18 GA	22 GA	C5	FCT-M-C5	HC5V	86550	-
LXHT14350	SEAMER		18 GA	22 GA	S2	FCT-M-S1	HS1V	86553	MA74000
22211N2	1" V NOTCHER		18 GA	22 GA	N2	-	-	-	-

S1 PEX TUBING CUTTER

HIGH-CARBON STEEL BLADE

Serrated stainless steel blade requires less force to make a cut, leaving a flush end

COMFORTABLE GRIPS

Rubberized handles allow for confident cutting even in wet or dirty environments

EASY OPEN & CLOSE


Conveniently positioned locking latch allows for true one-handed operation of spring-loaded cutter

CUTS UP TO 1" NOMINAL

(1-5/16" MAX. OD)



Straight Cuts

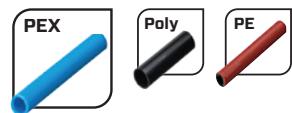

PEX

Poly

PE

S2 CPVC TUBING CUTTER

DURABLE CONSTRUCTION

HIGH-CARBON STEEL BLADE

Cuts rigid plastic tubing with a single cut

COMFORTABLE GRIPS

Rubberized handles allow for confident cutting even in wet or dirty environments

DURABLE CONSTRUCTION

Cast aluminum body stands up to rugged, repeated use

EASY OPEN & CLOSE


Conveniently positioned locking latch allows for true one-handed operation of spring-loaded cutter

CUTS UP TO 1" NOMINAL

(1-5/16" MAX. OD)



Easy Open
& Close

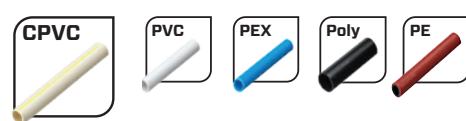

CPVC

PVC

PEX

Poly

PE

PROD NO	DESCRIPTION
12122S2	CPVC Cutter
12126S2B	Plastic Tubing Cutter Replacement Blade



LENOX® RATCHETING TUBING CUTTERS

OFFER 25% LESS EFFORT* FOR QUICK, EASY CUTTING

CLEAN, SQUARE CUTS

Straight and Easy Gets the Job Done Right



25% LESS EFFORT*

Premium Coated Stainless Steel Blade and High Leverage Design Cuts Rigid Plastic Tubing with Less Effort

DURABLE CONSTRUCTION

Cast Aluminum Body Stands up to Rugged, Repeated Use

EASY OPEN AND CLOSE

Conveniently Positioned Locking Latch Allows for True One-Handed Operation of the Spring-Loaded Cutter



COMFORTABLE GRIP

Rubberized Handles Allow for Confident Cutting Even in Wet, Dirty Environments

* Compared to LENOX® 12123R1 & 12124R2



1-5/8" Ratcheting Tubing Cutter

Cuts up to 1-1/4" in Nominal, 1-5/8" in O.D.

PROD NO	DESCRIPTION
LXHT80822	1-5/8" Ratcheting Tubing Cutter
LXHT14123	1-5/8" Ratcheting Tubing Cutter Replacement Blade

2-3/8" Ratcheting Tubing Cutter

Cuts up to 2" in Nominal, 2-3/8" in O.D.

PROD NO	DESCRIPTION
LXHT80823	2-3/8" Ratcheting Tubing Cutter
LXHT14124	2-3/8" Ratcheting Tubing Cutter Replacement Blade



TUBING CUTTERS

ERGONOMICALLY DESIGNED FOR PROFESSIONAL PERFORMANCE

WON'T WALK WHILE CUTTING

Four roller tracking system keeps tube from threading

PROFESSIONAL DEBURRING

Cleanly and easily deburr pipes with the replaceable machinist's reamer

WILL NOT DAMAGE CUTTING WHEELS

Full-stop feed system helps prevent wheels and rollers from coming into contact

EASY TO USE

Change out wheels quickly & easily

CONVENIENT STORAGE

Store an extra cutting wheel in the handle



PROD NO	DESCRIPTION	TUBE DIAMETER RANGE		NUMBER OF WHEELS
		IN	MM	
21008TC58	Copper Cutting	1/8-5/8	3-16	1
21009TC1	Copper Cutting	1/8-1	3-25	2
21010TC118	Copper Cutting	1/8-1-1/8	3-29	2
21011TC138	Copper Cutting	1/8-1-3/8	3-35	2
21012TC134	Copper Cutting	1/8-1-3/4	3-45	2
21013TC258	Copper/Plastic Cutting	1/4-2-5/8	6-67	2



21008TC58

21009TC1

21010TC118

21011TC138

21012TC134

21013TC258



TIGHT SPACE TUBING CUTTERS

CUTS YOU OUT OF A TIGHT SPOT

SMOOTH CUTS. LONG LIFE.™

Optimized blade geometry of shock-resistant steel

COMPACT DESIGN FOR TIGHT SPOTS

Non-slip grooved cast aluminum body only needs 1/2" clearance to cut

CORROSION RESISTANT

Stainless steel rollers protect the cutter from corrosion

QUICK IDENTIFICATION

Color coding for easy tool recognition and cutting direction



PROD NO	DESCRIPTION	TUBE DIAMETER RANGE		NUMBER OF WHEELS
		IN	MM	
14830TS12	Copper Cutting	1/2	13	1
14831TS34	Copper Cutting	3/4	19	1
14832TS1	Copper Cutting	1	25	1
14833TSK	3 pc Kit	1/2, 3/4, 1	13,19,25	—



14830TS12

14831TS34

14832TS1

14833TSK

TUBING CUTTER REPLACEMENT WHEELS

DESCRIPTION	2-PACK	PROD NO
Stainless Steel Cutting Wheels*		21193TCW158SS2
Plastic Cutting Wheels***		21191TCW158P2
Copper Cutting Wheels*		21192TCW158C2
Small Copper Cutting Wheels**		14829TSB

* Fits 21010, 21011, 21012, 21013 and many other competitors' Tubing Cutters.
** Fits LENOX Product No 21008, 21009, 14830, 14831, 14832.
*** Fits 21013.



Small Copper



Stainless Steel



Plastic



Copper

PLIERS WRENCH

3" WIDE JAW CAPACITY




SMOOTH JAWS

Designed to Protect Chrome and Plated Fittings

SKU	LENGTH (IN)	JAW CAPACITY
LXHT90540	10"	3"

QUICK-ADJUST PLIERS

UP TO 2X FASTER ADJUSTMENT

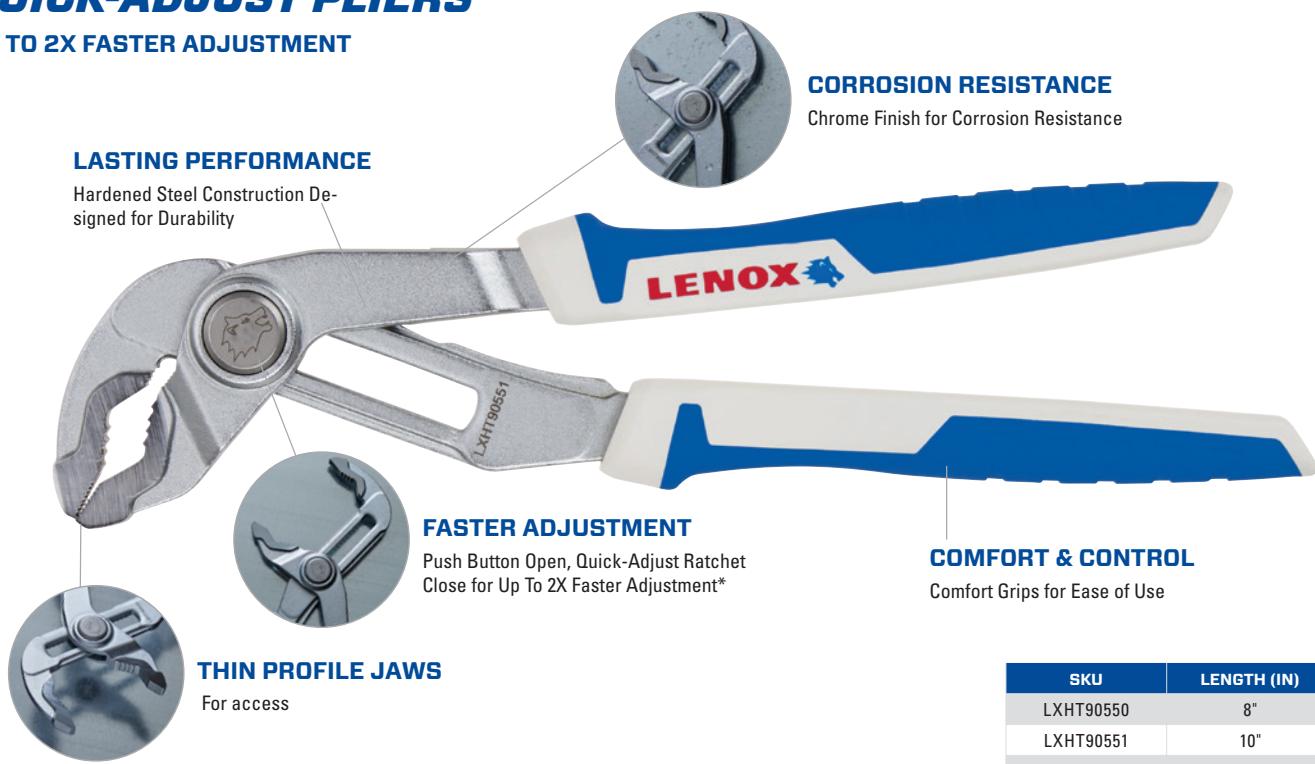

*vs. Traditional Groove Joint Pliers

SKU	LENGTH (IN)
LXHT90550	8"
LXHT90551	10"
LXHT90552	12"



ALUMINUM PIPE WRENCHES

HIGH TORQUE CAPACITY FOR HIGH PERFORMANCE




LIGHTWEIGHT & ROBUST

Lightweight Aluminum I-Beam Design for High Torque

SKU	MATERIAL	LENGTH (IN)	JAW CAPACITY
LXHT90610	Aluminum	10"	1.5"
LXHT90614	Aluminum	14"	2"
LXHT90618	Aluminum	18"	2.5"
LXHT90624	Aluminum	24"	3"
LXHT90636	Aluminum	36"	5"

CAST IRON PIPE WRENCHES

HIGH TORQUE CAPACITY FOR HIGH PERFORMANCE

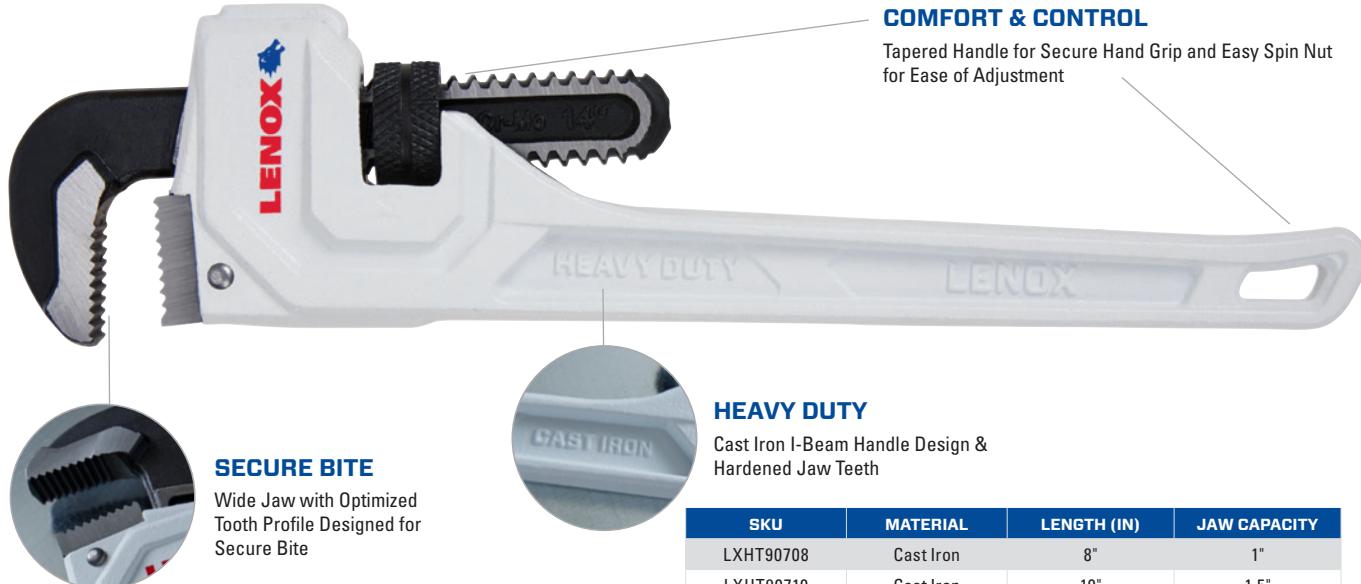

HEAVY DUTY

Cast Iron I-Beam Handle Design & Hardened Jaw Teeth

SKU	MATERIAL	LENGTH (IN)	JAW CAPACITY
LXHT90708	Cast Iron	8"	1"
LXHT90710	Cast Iron	10"	1.5"
LXHT90714	Cast Iron	14"	2"
LXHT90718	Cast Iron	18"	2.5"
LXHT90724	Cast Iron	24"	3"
LXHT90736	Cast Iron	36"	5"

STAINLESS STEEL HAWKBILL POCKET KNIFE

LONG LIFE AND DURABILITY

With premium stainless steel blade

USED FOR TOUGH CUTS

Curved shape is ideal for stripping and grabbing material

COMFORT AND SECURITY

With bi-material grip on durable metal handle



PROD NO	DESCRIPTION
LXHT10598	2.375" Stainless Steel Hawkbill Pocket Knife

LENOX AUTOLOAD RETRACTABLE FOLDING UTILITY KNIFE

EASY ACCESS TO A FRESH BLADE

With autoload rapid blade change

ENHANCED CUTTING CAPACITY

With extra extended blade position

INTERNAL BLADE STORAGE

For up to two extra blades

EASY CARRY

With Folding Feature

PROVEN TO STAY SHARP

Includes three titanium nitride coated bi-metal blades



PROD NO	DESCRIPTION
LXHT10600	LENOX Autoload Retractable Folding Utility Knife

RETRACTABLE UTILITY KNIFE

LONG LASTING UTILITY BLADES

Three shatterproof titanium nitride coated edge Bi-Metal blades included

INTERNAL BLADE STORAGE

Storage for up to ten additional blades.

EASY BLADE CHANGE

Quick blade release allows rotation or changing of blade without opening handle



PROD NO	DESCRIPTION
LXHT10599	LENOX Pro Retractable Utility Knife





RETRACTABLE AND FIXED UTILITY KNIVES

DURABLE CONSTRUCTION AND COMFORTABLE GRIP

LENOX GOLD® UTILITY KNIVES

EXTREMELY DURABLE STAINLESS STEEL NOSE

One piece titanium nitride coated nose resists wear and eliminates spreading

LONG LASTING UTILITY BLADES

Three shatterproof titanium nitride coated edge Bi-Metal blades included

INTERNAL BLADE STORAGE

Retractable knife stores up to five blades. Fixed knife stores up to ten blades

EASY BLADE CHANGE

Quick blade release allows rotation or changing of blade without opening handle



PROD NO	DESCRIPTION
20353SSRK1	LENOX GOLD® Quick Change Retractable Knife
20354SSFK1	LENOX GOLD® Fixed Blade Knife



FOLDING UTILITY KNIVES

PRECISION AND CONTROL

With compact handle and grip

EASY BLADE CHANGE

With Quick Blade Release Button

MULTI-USE TOOL

Includes bottle opener, screwdriver, and pipe reamer

LANYARD HOLE

For convenient storage

DESIGNED TO STAY SHARP

Comes with 1 LENOX Gold™ Blade

10771FLK1G



LXHT10601



PROD NO	DESCRIPTION
10771FLK1G	Locking Tradesman Fixed Blade Folding Utility Knife
LXHT10601	Fixed Blade Folding Utility Knife

FIXED BLADE TRADE KNIVES

IMPROVED DURABILITY

With a full-tang knife

SUSTAINED SHARPNESS

With durable stainless steel construction

SAFE STORAGE AND BLADE PROTECTION

Each knife includes a sheath

LXHT14701



LXHT14702



LXHT14703



UTILITY BLADES

TITANIUM NITRIDE COATED EDGE FOR MAXIMUM BLADE LIFE

LASTS LONGER

High speed steel edge with titanium coating keeps blades cutting after others have quit

STAYS SHARP

Patented Bi-Metal construction allows blades to bend and flex without breaking


MAKES DEEPER CUTS

Four notch design allows blade to extend further

Fits all standard utility knives

CUTS THE TOUGHEST MATERIALS

Drywall, Insulation, Flooring, Roofing and more

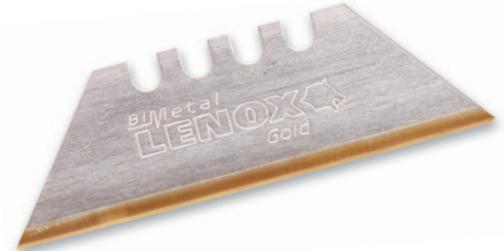

DESCRIPTION	5-PACK	50-PACK	100-PACK
LENOX GOLD® Utility Knife Blade	20350GOLD5C	20351GOLD50D	20352GOLD100D

CARBIDE EDGE KNIFE BLADES

CARBIDE EDGE FOR MAXIMUM BLADE LIFE

LASTS LONGER

Laser-coated carbide-edge blades last 10 times longer than standard steel blades.

Carbide powder deposited through a high powered laser improves durability and hardness.

Stands up to fire rated drywall, fiber glass, ceiling tiles, carpet and even cutting up against concrete.



DESCRIPTION	10-PACK	50-PACK
Carbide Edge Knife Blades with Small Dispenser	LXHT11800T	—
Carbide Edge Knife Blades with Bulk Dispenser	—	LXHT11800L



LEVELS

TORPEDO LEVEL

SOLID ALUMINUM BODY

For strength and durability

4-VIALS

Horizontal, 90, 45 & 22.5

PATENTED 1.5° INTEGRATED SLOPE BUTTON

For easy drainage measurements

V-GROOVE MAGNETIC BASE

For easy adhesion to metal pipes & conduit

TOP READ WINDOW

For easy viewing of center vial

B-TANK KEY

PRECISION MACHINED EDGES

For accuracy



PROD NO	DESCRIPTION
LXHT82658	Magnetic Plumbing Torpedo Level

LIGHTED TORPEDO LEVEL

SOLID ALUMINUM BODY

For strength and durability

3-VIALS

Horizontal, 90 & 45

LIGHTED VIAL

For improved viewing in dark spaces

PATENTED 1.5° INTEGRATED SLOPE BUTTON

For easy drainage measurements

V-GROOVE MAGNETIC BASE

For easy adhesion to metal pipes & conduit

TOP READ WINDOW

For easy viewing of center vial

B-TANK KEY

PRECISION MACHINED EDGES

For accuracy



PROD NO	DESCRIPTION
LXHT82659	Magnetic Lighted Plumbing Torpedo Level

ALL-IN-ONE SCREWDRIVERS

MORE TORQUE. MORE POWER.

COMFORTABLE GRIP

Slip-resistant ergonomic grip for maximum torque

REDUCED STRIPPING

25% thicker nut driver for longer life




PROD NO	DESCRIPTION	+	+	-	-	◎	◎	○	○	○
PROD NO	DESCRIPTION	#1	#2	3/16"	1/4"	1/4"	5/16"	#2	#3	3/8"
23931	6-1 Screwdriver	•	•	•	•	•	•	—	—	—
23932	9-1 Screwdriver	•	•	•	•	•	•	•	•	•

FIXED BAR SCREWDRIVERS

SIMULATED DIAMOND 6-PIECE SCREWDRIVER SET

The LENOX® Simulated DIAMOND Tip Screwdrivers feature a three-zone grip to provide optimal turning force and comfort on the job. The Simulated DIAMOND coated tip improves grip for a better transfer of power.* Crafted with S2 steel for bend resistance and durability.

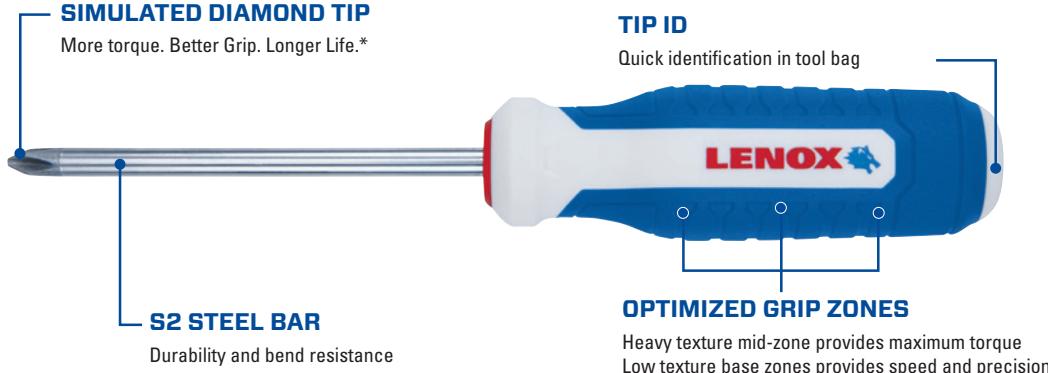


ITEM #	DESCRIPTION	SIZES INCLUDED
LXHT60900	LENOX® Simulated DIAMOND 6 PC Screwdriver Set	PH #1 - 3" PH #2 - 4" PH #3 - 6" SLCB 3/16" - 3" SLKS 1/4" - 4" SLKS 5/16" - 6"

DEMOLITION SCREWDRIVERS

SIMULATED DIAMOND 2-PIECE DEMOLITION SCREWDRIVER SET

The LENOX® Simulated DIAMOND Tip Demolition Screwdrivers include a solid steel core and strike cap made of S2 steel for jobsite toughness and durability.

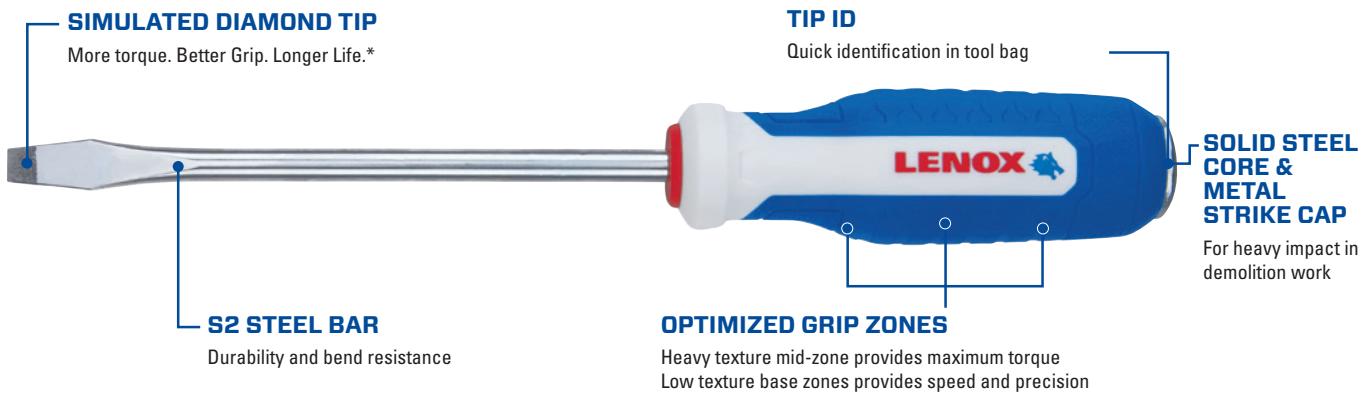

ITEM #	DESCRIPTION	SIZES INCLUDED
LXHT60905	LENOX® 2 PC Demolition Screwdriver Set	PH #2 - 6" SLKS 5/16" - 6"

*More torque, better grip, and longer life as compared to traditional LENOX® screwdrivers.



INSULATED SCREWDRIVERS

2-PIECE SLIM BLADE INSULATED SCREWDRIVER SET

The LENOX® Slim Blade Insulated Screwdrivers include insulated bars to protect users up to 1000-Volts. Crafted with S2 steel for bend resistance and durability.



ITEM #	DESCRIPTION	SIZES INCLUDED
LXHT60906	LENOX® 2 PC Slim Blade Insulated Screwdriver Set	PH #2 - 4" SLCB 1/4" - 4"

RATCHETING MULTI-BIT SCREWDRIVERS

8-IN-1 RATCHETING SCREWDRIVER

The LENOX® 8-in-1 Ratcheting Screwdriver includes eight tips in one tool and is compatible with insert bits and power bits for convenient replacement.



ITEM #	DESCRIPTION	SIZES INCLUDED
LXHT60902	LENOX® 8-in-1 Ratcheting Screwdriver	PH #1 PH #2 T25 SQ.#2 SL 8-10 1/4" Nut Driver 3/8" Nut Driver 5/16" Nut Driver

STUBBY RATCHETING SCREWDRIVERS

6-IN-1 STUBBY RATCHETING SCREWDRIVER

The LENOX® 6-in-1 Stubby Ratcheting Screwdriver is perfect for tight spaces. The drivers ratcheting feature allows the convenience of turning the driver without stopping to adjust wrist position.

ACCEPTS STANDARD BITS

Magnetized bit holder for convenient replacement



3-WAY RATCHETING

Allows the user to turn the driver without adjusting wrist position

COMPACT DESIGN

For use in tight spaces

IN-HANDLE STORAGE

Easy access to 6 insert bits

OPTIMIZED GRIP ZONES

Heavy texture mid-zone provides maximum torque
Low texture base zones provides speed and precision

ITEM #	DESCRIPTION	SIZES INCLUDED
LXHT60901	LENOX® 6-in-1 Stubby Ratcheting Screwdriver	PH #1 PH #2 PH #3 SQ #2 SL6-8 SL8-10

SCREW GUIDE DRIVERS

5-PIECE SCREW GUIDE DRIVER

The LENOX® Screw Guide Multi-Bit Driver features a metal sleeve that slides forward, keeping fasteners straight and eliminating screw wobble in unsteady applications.

ACCEPTS STANDARD BITS

Magnetized bit holder for convenient replacement

METAL SLEEVE

Slides forward to keep fastener straight and eliminate screw wobble

LENOX

OPTIMIZED GRIP ZONES

Heavy texture mid-zone provides maximum torque
Low texture base zones provides speed and precision

ITEM #	DESCRIPTION	SIZES INCLUDED
LXHT60924	LENOX® Screw Guide Driver	SL6-8 SL8-11 PH #1 PH #2 PH #3



EXTENDING SCREWDRIVERS

5-PIECE EXTENDING MULTI-BIT DRIVER

The LENOX® Extending Multi-Bit Screwdriver extends from 5" to 11", locking securely at each 1" increment for hard-to-reach spaces.

ACCEPTS STANDARD BITS

Magnetized bit holder for convenient replacement



QUICK-LOCKING MECHANISM

Securely locks at 1" increments for 7 different lengths

EXTENDING SHAFT

Driver extends from 5" to 11" for maximum versatility



OPTIMIZED GRIP ZONES

Heavy texture mid-zone provides maximum torque
Low texture base zones provides speed and precision

ITEM #	DESCRIPTION	SIZES INCLUDED
LXHT60925	LENOX® Extending Multi-Bit Driver	SL 6-8 SL 8-11 PH #1 PH #2 PH #3

HIGH LEVERAGE NUT DRIVERS

6-IN-1 HIGH LEVERAGE NUT DRIVER

Simplify the jobsite with the LENOX® 6-in-1 High Leverage Nut Driver with a variety of sizes to fasten nuts and bolts.

DOUBLE-ENDED DRIVERS

Compact, in-handle socket storage provides easy access to 3 double-ended sockets



HEX BOLSTER WITH MAX LEVERAGE HOLE

Maximum torque with wrench

OPTIMIZED GRIP ZONES


Heavy texture mid-zone provides maximum torque
Low texture base zones provides speed and precision

ITEM #	DESCRIPTION	SIZES INCLUDED
LXHT60904	LENOX® 6-in-1 High Leverage Nut Driver	1/4" 5/16" 11/32" 3/8" 7/16" 1/2"

NUT DRIVER SETS

4-PIECE HOLLOW SHAFT NUT DRIVER SET

LENOX® Fixed Bar Nut Drivers feature a three-zone grip to provide optimal turning force and comfort on the job. Hex bar included for additional torque with a wrench is required.

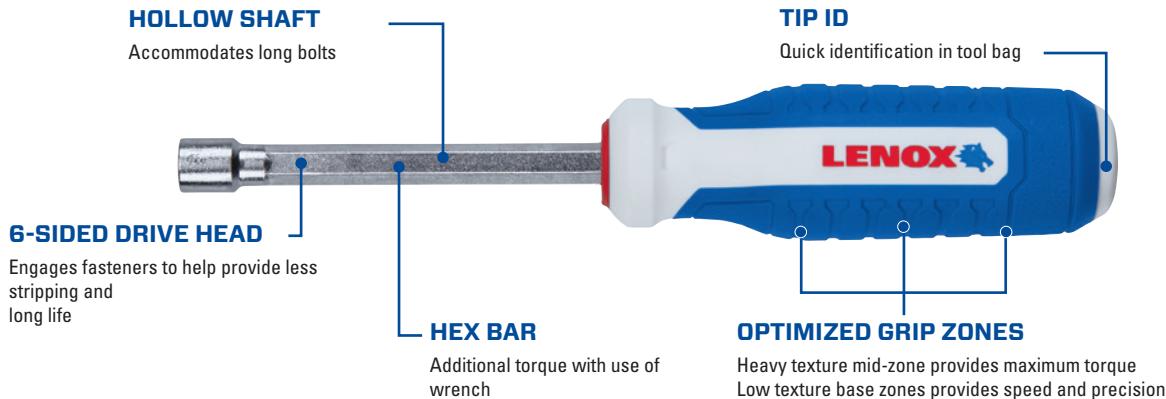

ITEM #	DESCRIPTION	SIZES INCLUDED
LXHT60903	LENOX® 4 PC Nut Driver Set	1/4" 5/16" 7/16" 9/16"

PRECISION SCREWDRIVERS

5-PIECE PRECISION SCREWDRIVER SET

The LENOX® Precision Screwdriver Set is crafted with soft grips to provide an extra level of comfort. The set includes a convenient, hard case for easy storage.



ITEM #	DESCRIPTION	SIZES INCLUDED
LXHT60918	LENOX® 5 PC Precision Screwdriver Set	SL 1/16" SL 3/32" SL 1/8" PH #0 PH #00 Plastic Case





18-PIECE PRECISION MULTI-BIT RATCHETING SCREWDRIVER SET

The LENOX® 18-Piece Precision Multi-Bit Ratcheting Screwdriver Set helps you conquer your everyday repair and precision fastening needs. The set includes a convenient, hard case for easy and convenient storage.



3-WAY RATCHETING


Allows the user to turn the driver without adjusting wrist position

OPTIMIZED GRIP ZONES

Heavy texture mid-zone provides maximum torque
Low texture base zones provides speed and precision

ITEM #	DESCRIPTION	SIZES INCLUDED
LXHT60917	LENOX® 18 PC Precision Multi-Bit Ratcheting Screwdriver Set	(4) Slotted Bits (3) Phillips Bits (6) Torx®* Bits (4) Hex Bits Plastic Case

*Torx is a trademark of Acument Intellectual Properties

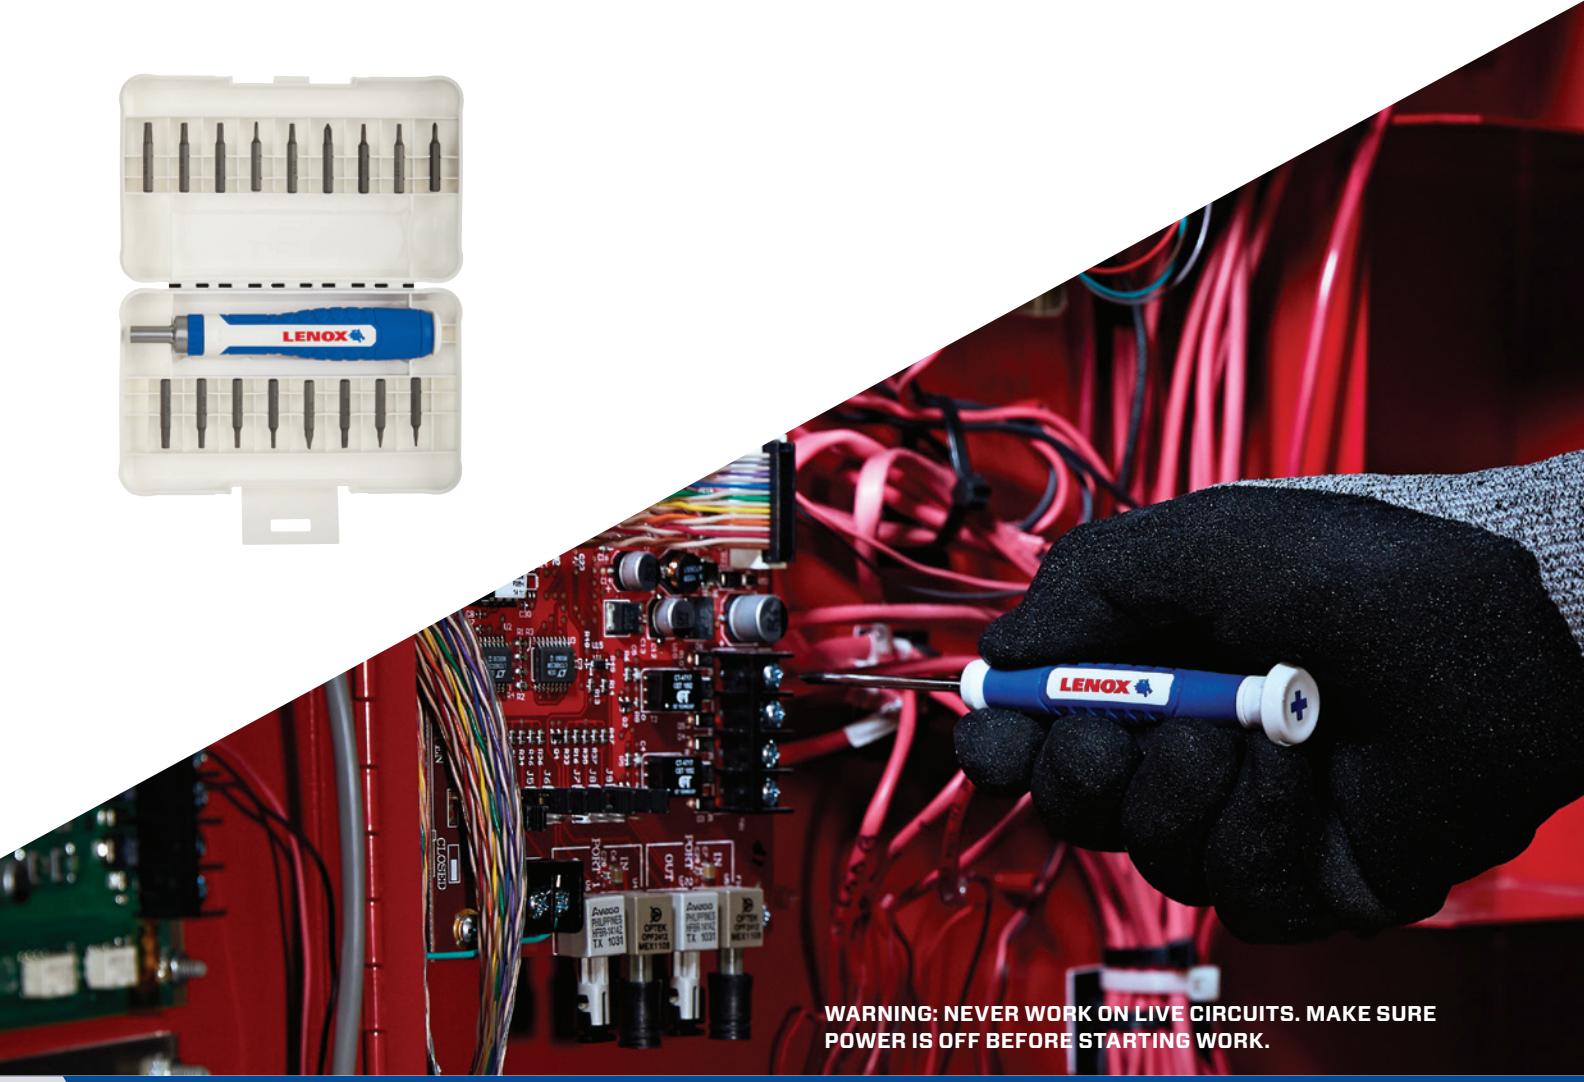

WARNING: NEVER WORK ON LIVE CIRCUITS. MAKE SURE POWER IS OFF BEFORE STARTING WORK.

SOFT STORAGE TOOL BAGS

GET ORGANIZED. GET WORKING.

GET ORGANIZED

Multiple pockets and storage options allow for easily locating the right tool

FUNCTIONAL DESIGN

Padded shoulder straps make carrying comfortable

Reflective materials make bag easy to find in darkness

Red liner helps to easily locate tools

HOLDS UP TO THE JOB

Water-resistant materials and reinforced rivets to withstand tough job site use

Bucket Tool Organizer



Plumber's Tote



Storage Backpack



Electrician's Tote

Contractor's Tool Bag

TOOL STORAGE BACKPACK

PROD NO	DESCRIPTION
1894646	14" Storage Backpack

- 5 Open storage areas
- 12 Exterior pockets
- 16 Elastic loops
- 8 Interior pockets
- Tape measure clip
- Key clip
- Tape holder loop
- Small parts bin
- Clip on handle
- Padded shoulder strap
- Reflective material
- Reinforced rivets
- Water-resistant bottom
- Protective pad feet on bottom



Padded Shoulder Pads



Back Pads





ELECTRICIAN'S TOTE

PROD NO	DESCRIPTION
1787422	10" Electrician's Tote

- 5 Open storage areas
- 12 Exterior pockets
- 16 Elastic loops
- 8 Interior pockets
- Tape measure clip
- Key clip
- Tape holder loop
- Small parts bin
- Clip on handle
- Padded shoulder strap
- Reflective material
- Reinforced rivets
- Water-resistant bottom
- Protective pad feet on bottom



Tape Loop



Key Clip



Handle Clip

CONTRACTOR'S TOOL BAG

PROD NO	DESCRIPTION
1787426	16" Contractor's Tool Bag

- Large open-mouth bag
- 14 Interior pockets
- Small parts bin
- Padded shoulder strap
- Reflective material
- Reinforced water-resistant bottom
- Protective pad feet on bottom



Small Parts Bin

PLUMBER'S TOTE

PROD NO	DESCRIPTION
1787474	19" Plumber's Tote

- 9 Exterior pockets
- 14 Interior pockets
- 10 Elastic loops
- Hacksaw pocket
- Tape measure clip
- Tape holder loop
- Foldable handle
- Padded shoulder strap
- Reflective material
- Hard plastic waterproof bottom



Tape Loop

Hacksaw not included

BUCKET TOOL ORGANIZER

PROD NO	DESCRIPTION
1787473	Bucket Tool Organizer

- 22 Exterior pockets
- 12 Interior pockets
- Hammer loop
- Tape holder loop
- Foldable handle
- Padded shoulder strap
- Side clips secure the organizer
- Reflective material



Bucket not included



Shoulder Strap



Side Clip



LENOX®
ALWAYS HUNGRY.

facebook.com/lenoxtools

twitter.com/lenoxtools

instagram.com/lenoxtools

Customer Service: 800-628-8810

Technical Support: 800-642-0010

lenoxtools.com

cutwithLENOX.com

301 Chestnut Street,
East Longmeadow, MA 01028-0504 USA